


# SD PRO-TEK™

**IN STOCK!**




- **Engineered Low Profile Head!**

- **Concealed Weather-Tite Washer!**
- **Forged Drill Point for MAX Cutting Power!**

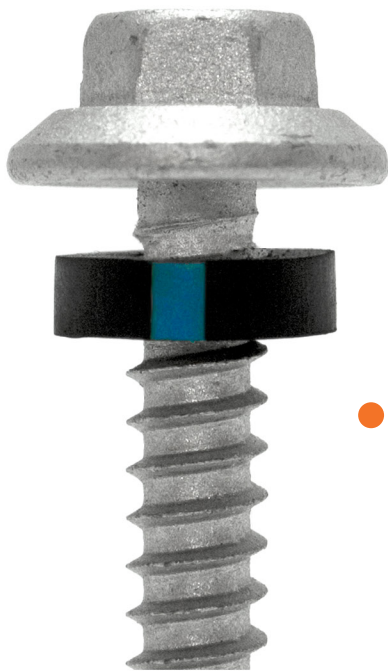

- **Innovative Cut Threads!**

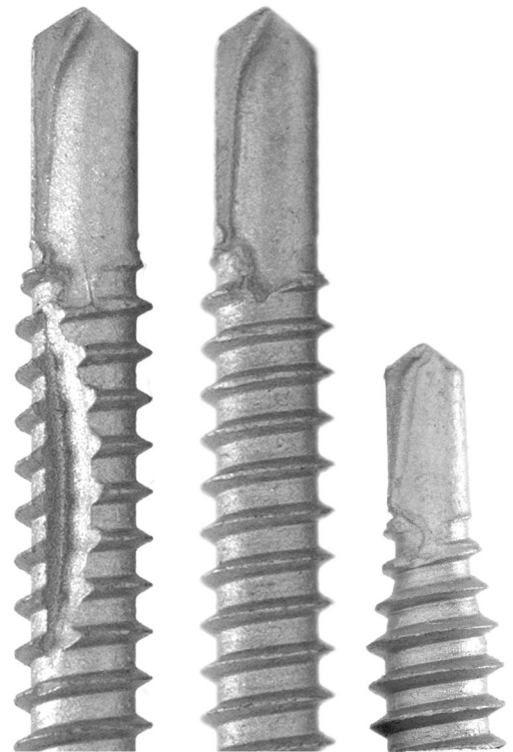

**LAKESIDE**  
CONSTRUCTION FASTENERS




To purchase contact us at:  
1203 Goldsmith Road, Paragould, AR 72450  
870-586-0703 (office) | 870-586-0643 (fax)  
800-537-4160 (toll free)  
[www.lakeside-fasteners.com](http://www.lakeside-fasteners.com)

# "Lakeside Construction Fasteners Providing Alternative Fastener and Foam Solutions!"™



**Fastener Dia.:** #12  
**Head Size:** 5/16"  
**Threads:** 14 per inch  
**Innovation:** Self Driller Point & Cut Threads  
**SD Point:** SD1 & SD3  
**HWH:** Low Profile Head  
**Material:** C1022  
**Washer:** EPDM Tubular  
**Coating System:** L3 Dura Protec™

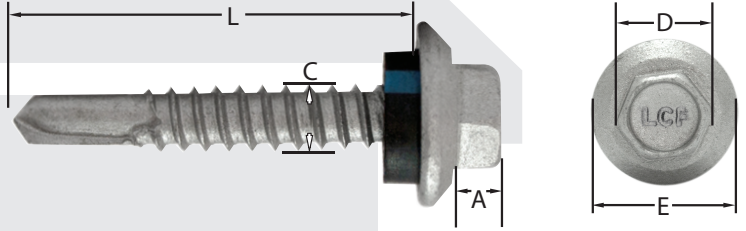

Part #	L	A	C	D	E
1234250PTKSD3SG	3/4" Stitch	.14	.215	5/16	.410
1478250PTKSD1SG	7/8" LAP	.14	.215	5/16	.410
1210250PTKSD3SG	1"	.14	.215	5/16	.410
1214250PTKSD3SG	1 1/4"	.14	.215	5/16	.410
1215250PTKSD3SG	1 1/2"	.14	.215	5/16	.410
1220250PTKSD3SG	2"	.14	.215	5/16	.410

## Standard Options:



Wet Paint



## Customized Options:



Powder Coat




Available Without Washer Upon Request.

PULL-OUT TEST VALUES			
Fastener Type	12 ga.	14 ga.	16 ga.
Pro-Tek™ 12-14	1679 lbs.	1107 lbs.	932 lbs.
Pro-Tek™ 1/4-14	1269 lbs.	1050 lbs.	683 lbs.

FASTENER SYSTEM VALUES			
Fastener Type	Torsional	Shear	Tensile
Pro-Tek™ 12-14	115 in lbs.	2235 lbs.	3300 lbs.
Pro-Tek™ 1/4-14	160 in lbs.	2755 lbs.	3915 lbs.

PULLOVER TEST VALUES			
Fastener Type	24 ga.	26 ga.	29 ga.
Pro-Tek™ 12-14	1315 lbs.	1099 lbs.	717 lbs.
Pro-Tek™ 1/4-14	1295 lbs.	1027 lbs.	749 lbs.

Note: Testing values are nominal

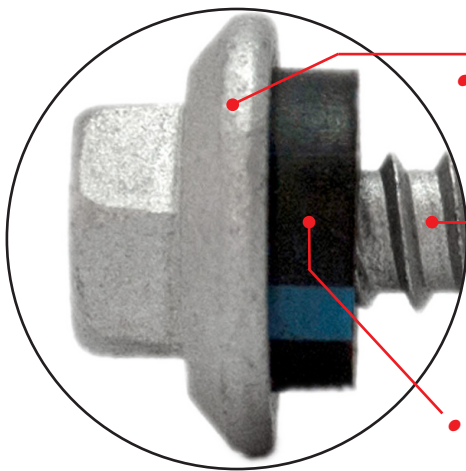

• **Engineered Head to Prevent Wobble!**

• **Deep Root Threads for Max Holding Power!**

• **Concealed Washer**

SD Pro-Tek™ self-drilling fastener is developed for metal-to-metal building applications. The innovative SD Pro-Tek™ with a larger head diameter limits wind uplift, and the concealed EPDM tubular washer system allows for a weather-tite seal. The engineered flat surface area on the SD Pro-Tek™ also provides positive nutsetter engagement, preventing wobble during fastener install. Deep root cut threads give the SD Pro-Tek™ Maximum Holding Power when installed into metal building panels!

FOLLOW US ON



To purchase contact us at:  
 1203 Goldsmith Road, Paragould, AR 72450  
 870-586-0703 (office) | 870-586-0643 (fax)  
 800-537-4160 (toll free)  
[www.lakeside-fasteners.com](http://www.lakeside-fasteners.com)

**LAKESIDE**  
 CONSTRUCTION FASTENERS