

PROGUARD SEAL™

EXPANDED UNIVERSAL CLOSURE

ProGuard Seal: Expanded Universal Closure™ by Lakeside Construction Fasteners allows for fast installation and conforms to various metal panel profiles creating a weather tight barrier preventing the natural outside elements from penetrating inside the building structure. LCF developed this innovative product offering as an “alternative solution” to die cut closures. With the **ProGuard Seal: Expanded Universal Closure™** only one product is now needed to conform around the minor/major panel contours. With our patented UV Inhibitor and Anti-Microbial Coating System this product can be exposed to direct sunlight or weather without fail!


PROGUARD SEAL™ SYSTEM:

- Engineered Weather Barrier!
- Patented UV Inhibitor Coating!
- Patented Anti-Microbial Coating!
- 20 Year Limited Warranty!

**New
Retail
10 Roll
Carton
Option!**



Made in the U.S.A.



LAKESIDE™
CONSTRUCTION FASTENERS

To purchase contact us at:
1203 Goldsmith Road, Paragould, AR 72450
870-586-0703 (office) | 870-586-0643 (fax)
800-537-4160 (toll free)
www.lakeside-fasteners.com

3-2023_V24



Description: 1", 1.5", 2" High Rib

Available in wider or higher profiles upon request.

Size: 1" x 1" x 20', 1.5" x 1.5" x 20', 1.5" x 1.5" x 25'
2" x 2" x 20' (Ag/Residential)

Retail: 1" x 1" x 20' (10 Rolls/Carton)
1.5" x 1.5" x 20' (10 Rolls/Carton)

Innovation: Patented UV Inhibitor & Antimicrobial with Adhesive Bonding Agent


Material: Closed Cell

The adhesive on the **ProGuard Seal™** is applied to the full length and width of the product. Once attached creates a long-lasting bond to the metal panel sealing gaps within the metal building structure. The **ProGuard Seal™** is extremely versatile which can be used in the hip, valley, eaves, ridge, edge trims, and soffits. Truly, the **ProGuard Seal™** limits the amount of different die cut profiles a contractor or roll former might need to stock. **ProGuard Seal™** is the "Universal Solution" for all building applications where a weather tight seal is needed!

For additional information on this product please contact Lakeside Construction Fasteners.



"Engineered Weather Barrier"

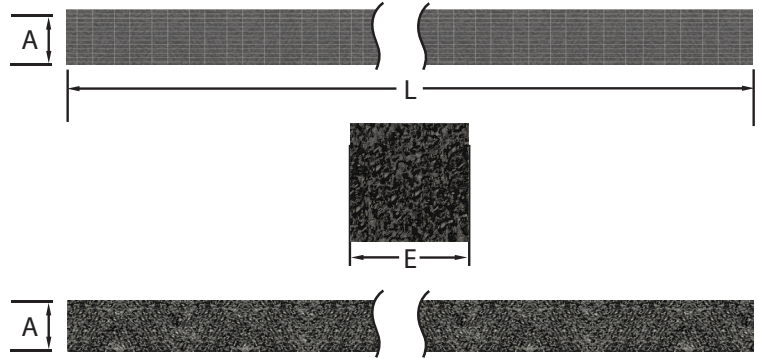

Part #	A	L	E
101020NVUC	1"	20'	1"
151520NVUC	1.5"	20'	1.5"
151525NVUC	1.5"	25'	1.5"
202020NVUC	2"	20'	2"
101020NVUC10P	1"	20'	1"
151520NVUC10P	1.5"	20'	1.5"



WATER PROOF



DIRT PROOF



SNOW PROOF



HEAT PROOF



INSECT PROOF

Specifications

Ignition Point.....	600° - 650°F (315.5° - 343.3°C)
Autolignition Point.....	750° - 800°F (398.8° - 426.6°C)
Density.....	0.5 - 15.0 lbs. per cu. ft.
Rebound.....	36%
Tensile Strength.....	13.5 lbs. per sq. in.
Tear Resistance.....	1.7 lbs. per in.
Ultimate Elongation.....	136%



Made in the U.S.A.

LAKESIDE
CONSTRUCTION FASTENERS

FOLLOW US ON

You Tube



To purchase contact us at:

1203 Goldsmith Road, Paragould, AR 72450
870-586-0703 (office) | 870-586-0643 (fax)
800-537-4160 (toll free)
www.lakeside-fasteners.com