

SC110VENT™

Your Complete Ridge Venting Solution!

The **SC110VENT™** by Lakeside Construction Fasteners offers installers and contractors an affordable premium venting system with one of the lowest in place cost! The patented design of the **SC110VENT™** open cell structure prevents water, dirt, and snow from penetrating the building structure at the ridge cap. **SC110VENT™** promotes positive air ventilation throughout the building envelope which starts at the ridge cap! The special formulated UV Coating allows the **SC110VENT™** to resist high temperature environments and prevents the open cell structure from collapsing! The **SC110VENT™** is Your Complete Ridge Venting Solution!

SC110VENT™ SYSTEM:

- **Designed for Low Cost Installation!**
- **Dade County (HWHZ) 110 MPH Approved!**
- **Florida Building Code Approved!**
(FL # 4640-R1)
- **2 Adhesive Strips for Secure Installation!**
- **40 Year Limited Warranty!**



Made in the U.S.A.



WATER PROOF



DIRT PROOF



SNOW PROOF



HEAT PROOF



INSECT PROOF



LAKESIDE™
CONSTRUCTION FASTENERS

FOLLOW US ON

You Tube



To purchase contact us at:

1203 Goldsmith Road, Paragould, AR 72450
870-586-0703 (office) | 870-586-0643 (fax)
800-537-4160 (toll free)
www.lakeside-fasteners.com

Your Complete Ridge Venting Solution!

Description: 1-1/4" x 10' - (10 rolls per carton)
 1-1/2" x 10' - (10 rolls per carton)
 2-1/4" x 10' - (10 rolls per carton)
 1-1/4" x 50' - (36 rolls per tote)
 1-1/2" x 50' - (36 rolls per tote)
 2-1/4" x 50' - (30 rolls per tote)


Size: Panel Profiles from 1/2" to 2"

Innovation: Patented UV & Antimicrobial Coating
 2 Adhesive Strips

Material: Open Cell; Promotes Free Air Flow

SC110VENT™

Your Complete Ridge Venting Solution!

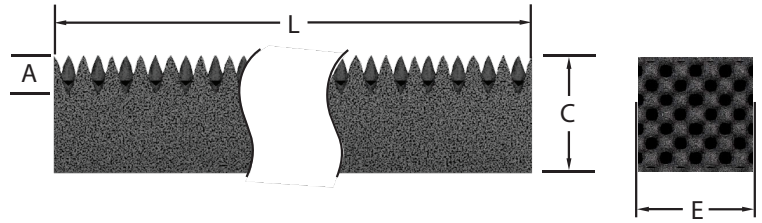

Part #	L	C	A	E
11410SV	10'	1 1/4"	1/2"	2"
11210SV	10'	1 1/2"	1/2"	2"



WATER PROOF



DIRT PROOF




SNOW PROOF




HEAT PROOF



INSECT PROOF

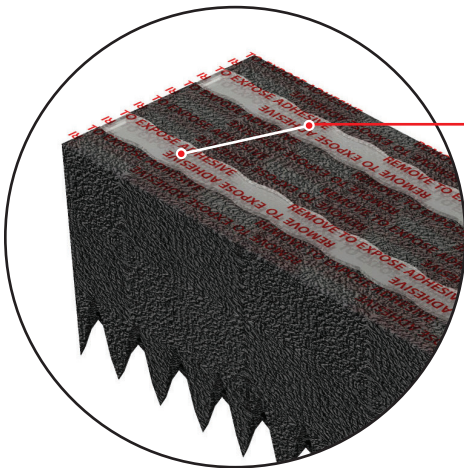

• **2 Adhesive Strips for Secure Insulation!**

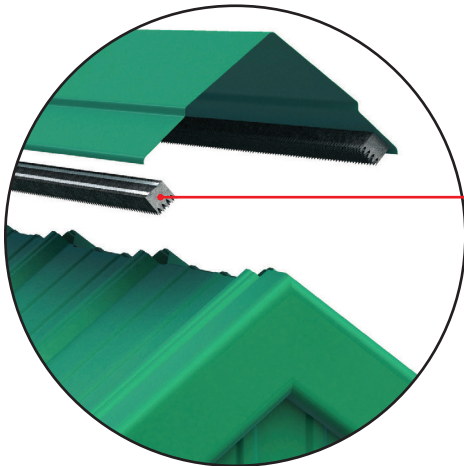

• **Designed for Low Cost Fast Installation!**

Specifications

Air Permeability 760 Cubic Feet per minute
 Heat Resistance 325°F (163°C) for 550 hours
 Cold Crack -130°F (-55°C)
 Snow Infiltration 0
 Tensile Strength 16 PSI – Elongation 175%
 Attic Ventilation Meets UBC Code
 Net Free Area 17.6 sq. inches per Linear Foot at the ridge
 Fire Rated ASTM E84 CLASS A



Made in the U.S.A.



LAKESIDE
 CONSTRUCTION FASTENERS

To purchase contact us at:
 1203 Goldsmith Road, Paragould, AR 72450
 870-586-0703 (office) | 870-586-0643 (fax)
 800-537-4160 (toll free)
www.lakeside-fasteners.com