FASTENER HEADS GUARANTEED NOT TO RED RUST!





- H-Low[™] Threads!
- Deep Threads for Max Holding Power!

• EPDM Concealed Washer!

• Type-17 Cut Point!



FOLLOW US ON

You Tube

P

f 🔘





To purchase contact us at: 1203 Goldsmith Road, Paragould, AR 72450 **870-586-0703** (office) \ **870-586-0643** (fax) **800-537-4160** (toll free) **www.lakeside-fasteners.com** 2-





Fastener Dia	.: #10
Head Size:	5/16"
Threads:	14 per inch
Innovation:	Fastener Head will not Red Rust H-Low™ Threads
Cut Point:	Type-17
HWH:	ZAMAK forged alloy head
Material:	1022
Washer:	EPDM Tubular
Coating System:	L3 Dura Protec™

Standard Options:



Customized Options:




Restaur

ide Pack

H-LOW

#9 and #12 Self-Tappers Available Upon Request.

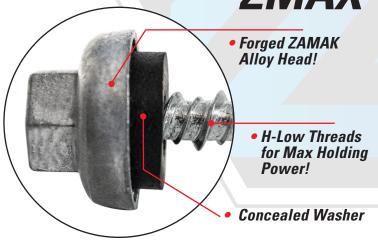

ZMAX[™] Forged to Last!

1150 lbs.

ZMAX™

FOLLOW US ON

ZMAX[™] alloy head fasteners are engineered and developed for high corrosion applications. ZMAX[™] offers a larger outer head diameter to prevent wind uplift and suitable in high snow load regions. Ideal for coastal environments, preventing Red Rust on fastener heads once installed into metal building systems. ZMAX[™] is the Forged Long-Life fastener of choice by contractors and builders!


To purchase contact us at:

800-537-4160 (toll free)

1203 Goldsmith Road, Paragould, AR 72450 870-586-0703 (office) \ 870-586-0643 (fax)

www.lakeside-fasteners.com







810 lbs.

Part #	L	A	С	D	E
ZA1010MX	1"	.165	.199	5/16	.580
ZA1015MX	1 1/2"	.165	.199	5/16	.580
ZA1020MX	2"	.165	.199	5/16	.580
ZA1025MX	2 1/2"	.165	.199	5/16	.580
ZA1030MX	3"	.165	.199	5/16	.580

PULLOUT TEST VALUES										
PLYWOOD			OSB		SOUTHERN PINE					
1/2"	5/8		3/4"	7/16"		1"	1-1/2"			
450	600)	750	350	8	05	1250			
Fastener Type Torsional			Toroional	Shear		Tensile				
Fastener Type			TUISIUIIdi	Silear		Telisile				
ZMAX [™] 70 in lbs		70 in Ibs.	1900 lbs.		2300 lbs.					
PULLOVER TEST VALUES										
Fastener Type 24 g		24 ga.	26 ga.			29 ga.				

980 lbs.