490 / 491

490 NON INSULATED

491 INSULATED

doorLink Manufacturing, Inc.®

Raised Ranch Panel 24 Gauge

RAISED PANELS

↑ ALMOND | WILLIAMSBURG WINDOW

↑ WHITE

Raised Ranch Panel

Constructed of top quality materials, highly detailed raised ranch panel, deep woodgrain texture, and two coat prefinished paint system all combine to enhance the beauty of your home.

- 24 gauge steel
- 1.0 mil paint with 7 color options
- 6 window options
- R-value 6.85 **491 Feature*
- Vinyl interior skin **491 Feature*

WHITE ALMOND DESERT TAN SANDSTONE BROWN GRAY BLACK

**Colors may vary from actual product*

490 / 491

490 NON INSULATED / 491 INSULATED

Raised Ranch Panel
24 Gauge

RAISED PANELS

FEATURES

24 GAUGE STEEL
Hot dipped galvanized steel construction with hemmed inside return rail provides superior strength and durability.

ROLLED SAFETY EDGES ON SECTION JOINTS
Eliminates sharp edges, and provides extra strength.

19 GAUGE HOT DIPPED GALVANIZED STILES
Heavy duty metal stiles give strong rigid support for all hinges, rollers, and operator attachment.

STILES ATTACHED WITH RIVETS
Provides superior strength when compared to common sheet metal joining methods.

TONGUE AND GROOVE MEETING RAILS
For superior strength and better sealing against wind, rain, and snow.

RIGID ALUMINUM RETAINER WITH WEATHERSTRIP
Provides added strength while securing replaceable U-type bottom astragal weatherstrip to help keep the elements out.

R-VALUE 6.85
Enhances your home's energy savings, makes your door operation quieter, and reduces exterior noise in your garage.
**491 Feature*

HIGH IMPACT PLASTIC BACK COVER
Protects the insulation, and enhances the interior look of your garage door. **491 Feature*

CFC FREE EXPANDED POLYSTYRENE
Environmentally friendly insulation that will not degrade with vibration or time. **491 Feature*

WINDOW OPTIONS

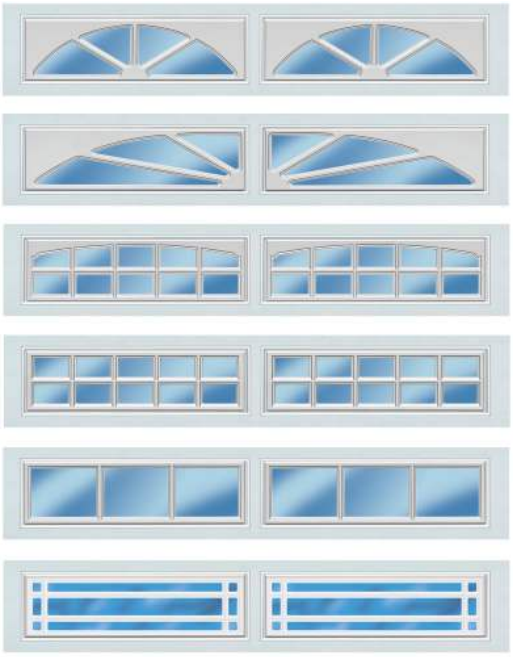

#306 Sherwood

#305 Williamsburg

#591 Cascade

#397 Stockton

#597 Stockbridge

#897 Prairie

WINDOW GLASS OPTIONS

See website for glass options

**Not all glazing options may be available from all distributors. No glazing on 18" sections.*

PAINT LAYERS



1.0 MIL PAINT SYSTEM
Includes .25 mil rust inhibiting primer and .75 mil exterior top coat that resists fading and chalking, while providing consistent color from panel to panel and more durability.

1. Paint - .75 MIL
2. Primer - .25 MIL
3. Steel
4. Primer - .2 MIL
5. Paint - .3 MIL

SIZE OPTIONS

WIDTHS:

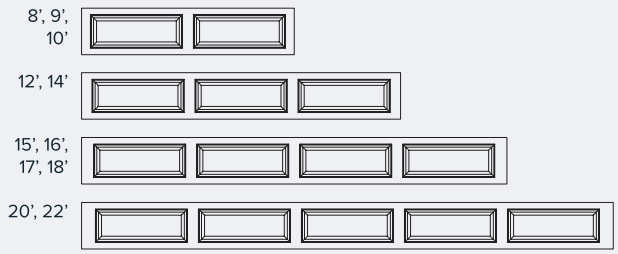

HEIGHTS: 6'6", 6'9", 7'0", 7'6", 7'9", 8'0"

CONSTRUCTION

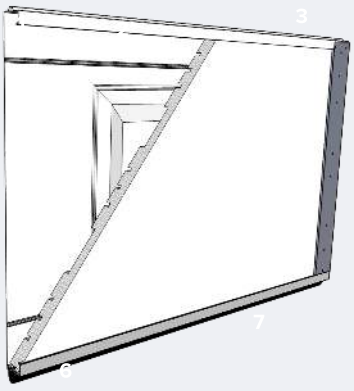

1. Tongue and groove meeting rails
2. Hemmed interior rails
3. 2" thick section
4. 19 gauge hot dipped galvanized steel stiles
5. CFC free expanded polystyrene insulation with vinyl backing (standard on 491)
6. Replaceable U-Type vinyl bottom weatherstrip
7. Extruded aluminum weatherstrip retainer

**This image is showing 491*

doorLink Manufacturing, Inc.
5700 NW 39th St, Riverside, MO 64150
816-474-3900 / sales@doorlinkmfg.com

© doorLink Manufacturing, Inc.

Made in USA

40% ENERGY PRODUCED BY SOLAR

IDA International Door Association

DASMA

See what this door looks like on your own home at doorLinkmfg.com