

IMPORTANT NOTICE

READ THIS MANUAL COMPLETELY PRIOR TO BEGINNING THE INSTALLATION OF THE MP210 ROOFING SYSTEM. THE MANUFACTURER DETAILS MUST BE FOLLOWED AS A MINIMUM TO INSURE APPROPRIATE WARRANTIES WILL BE ISSUED.

ALWAYS INSPECTEACH AND EVERY PANEL AND ALL ACCESSORIES BEFORE INSTALLATION. NEVER INSTALL ANY PRODUCT IF ITS QUALITY IS IN QUESTION. NOTIFY INDIANA METAL IMMEDIATELY IF ANY PRODUCT IS BELIEVED TO BE OUT OF TOLERANCE, SPECIFICATION OR HAS BEEN DAMAGED DURING SHIPMENT.

IF THERE IS A CONFLICT BETWEEN PROJECT INSTALLATION DRAWINGS PROVIDED OR APPROVED BY THE MANUFACTURER AND DETAILS IN THIS MANUAL, PROJECT INSTALLATION DRAWINGS WILL TAKE PRECEDENCE.

Ice Dam Disclaimer

INDIANA METAL designs it's standing seam roofs to meet the load requirements dictated by governing codes and project specifications, including applicable snow loads. However, Indiana Metal expressly disclaims responsibilty for weathertightness or roof point loading issues or other hazards resulting from ice dam situations. Any time ice and snow can melt on the main body of the roof and refreeze at the eave or in the shadow of an adjacent wall, an ice dam situation may develop. In addition to local climate,

ice dam formation is affected by many other factors, including but not limited to, roof insulation R value, roof panel color, interior temperature of building, heater location in building, eave overhangs, parapet walls, shading of building roof areas from adjacent trees, parapets, buildings, etc. These factors are design and maintenance issues and are outside the control of INDIANA METAL. INDIANA METAL specifically disclaims any liability for damage due to ice dam formation, although the following issues should be taken into consideration concerning standing seam roofs installed in freezing climates:

- · Always use field seamed panels. These machine-folded seams are more durable when subjected to occasional icing.
- Eliminate "cold" eave overhangs and parapet walls from the building design. Roof overhangs outside the heated envelope of the building will tend to be colder than the roof areas over the heated envelope. Simple roof designs are preferred. Parapet walls at the eave allow ice and snow to collect due to shading effects and the lower roof temperatures caused thereby.
- Make sure the interior of the building is adequately insulated and the heating is properly distributed. Inadequate insulation in the roof and/or improper heat distribution causes heat flow though the main body of the roof. On days when the temperature is below freezing, this heat gain can cause ice and snow to melt and refreeze at the eave where the roof is colder.
- Lay out the building to prevent the eaves and other roof areas from being shaded during the winter. This may mean
 eliminating adjacent trees or reconsidering roof geometries.
- · Consider using self-regulating heating cables at the eaves to mitigate the effects of ice dams.
- On building designs using attics, over-insulate the attic floor and provide adequate ventilation in the attic. This will
 reduce heat transfer through the roof resulting in more consistent roof temperatures between eave and field of roof.
- Increase the degree of diligence with respect to underlayment materials at roof areas prone to icing. This may include valleys, eaves, dormers and roof areas near dormers, parapets and the like where shading may occur. Underlayments are required for any and all Indiana Metal roofing panels.

For more information on this subject, please refer to the MCA's Metal Roof Design For Cold Climates manual.

The engineering data contained herein is for the expressed use of customers and design professionals. Along with this data, it is recommended that the design professional have a copy of the most current version of the North American Specification for the Design of Cold-Formed Steel Structural Members published by the American Iron and Steel Institute to facilitate design. This Specification contains the design criteria for cold-formed steel components. Along with the Specification, the designer should reference the most current building code applicable to the project jobsite in order to determine environmental loads. If further information or guidance regarding cold-formed design practices is desired, please contact the manufacturer

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, Indiana Metal reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. Application details are for illustration purposes only and may not be appropriate for all environmental conditions, building designs or panel profiles. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. If there is a conflict between this manual and project erection drawings, the erection drawings will take presence.



TABLE OF CONTENTS

ROOFING SYSTEM


KOOT ING STSTEM							
General Description							
Architect/Engineering Information	SL-4						
ENGINEERING							
Read This First	SL-5						
UL 90 Requirements	SL-6						
15" Properties/Load Tables	SL-7 – SL-8						
18" Properties/Load Tables	SL-9 – SL-10						
GENERAL INFORMATION							
Product Checklist	SL-11 – SL-20						
Panel Orientation							
Installation Guidelines	SL-21						
Preparatory Requirements							
Unloading							
Handling/Panel Storage							
Proper Handling, Storage and Maintenance of Painted and Galvalume Plus® Panels							
INSTALLATION SEQUENCE							
Step 1 — Rake Attachments	SL-28						
Step 2 — Low System Eave							
Step 2A — High System Eave							
Step 3 — Thermal Spacer (For High Systems Only)							
Step 4 — First Panel							
Step 5 — Clip Installation							
Step 6 — Endlap							
Step 7 — Ridge							
Step 8 — Subsequent Runs Eave							
Step 9 — Subsequent Runs Endlap							
Step 10 — Subsequent Runs Ridge							
Step 11 — Last Panel Run	SL-39						
Step 12 — Seaming Operation	SL-40 – SL-42						
Step 13 — Outside Closure Installation	SL-43						
SPECIAL ERECTION TECHNIQUES							
UL 90 Light Transmitting Panel Installation	SL-44						
Riveted Rail Light Transmitting Panel Installation							
Curb Installation	SL-48 – SL-66						
Pipe Penetration Installation	SL-67 – SL-68						
DETAILS							
Open Framing							
Fixed Eave With Sculptured Gutter							
Fixed Eave With Sculptured Eave Trim							
Fixed Eave With Box Eave Trim							
Floating Ridge							
Floating Vented Ridge							
Fixed Vented Eave Sculptured Rake							
·							
Sculptured Rake With Cleat							
Floating Sculptured High Side Eave							
Parapet Floating High Side Eave							
Fixed Valley							
Floating Hip							

TABLE OF CONTENTS

Wood Deck	
Field Hemming Panel End	SL-82
Floating Endlap	SL-83
Floating Eave with Box Gutter	SL-84
Floating Eave with Eave Trim with Extended Drip Edge	SL-85
Fixed Ridge	SL-86
Fixed Vented Ridge	SL-87
Box Rake	SL-88
Parapet Rake	SL-89
Fixed Box High Side Eave	SL-90
Parapet Fixed High Side Eave	
Floating Valley	
Fixed Hip.	
Rigid Insulation Over Metal Deck	
Floating Endlap	SL-9 ²
Floating Eave With Box Gutter	
Floating Eave With Eave Trim with Extended Drip Edge	
Fixed Ridge	
Fixed Vented Ridge	
Box Rake	
Parapet Rake	SL-100
Fixed Box High Side Eave	SL-101
Parapet Fixed High Side Eave	
Floating Valley	
Fixed Hip	
1	

ROOFING SYSTEM

GENERAL DESCRIPTION

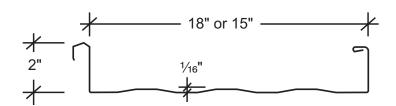

Coverage Width - 15" or 18"

Minimum Slope - 1/2:12

Panel Attachment - Low, High (Fixed or Floating)

Panel Substrate - Galvalume® (standard)

Gauge - Standard: 24; Optional: 22

Finishes - Smooth Striated (standard)* or Embossed Striated

Coatings - Signature® 200, Signature® 300, Signature® 300 Metallic

CAUTION

Diaphragm capabilities and purlin stability are not provided by manufactures MP210 roof system. Therefore, other bracing may be required to conform to A.I.S.C. or A.I.S.I. specifications.

ROOFING SYSTEM

5F7<+H97H#9B; +B99F*+B: CFA5H+CB

- 1. MMP210 ã ÁæÁ, ^&@e) aðæl|^Án^æ, ^åÁ[[-Án^•c^{EMMP210] æ) ^|•Áæ;^Áæçæálæà|^Áa, Ár5Äæ) åÁr8Ä, ãã c@ ÈØæða[¦^Áæ]]|āð å {æ cãðÁa, •ãa^Á, -Án^{æ;^Án, -Án^{æ;^A, að ^|Æa, Ad } að Af & æ} åæå ÀÈ
- 2. MMP210 ã ÁæÁ d`8c ˈlæÁ[[-ā]*Á,æ)^|ÈÁ @áÁ,æ)^|Á&æ) Áå√ÁB, œd|^å Áåã^ &dˆA,ç^\Á,`;|B, Á; I Áàæ ÁB,ã o ÈÃQÁå[^• A, [c \^``ã^\ æÁ[|ãáÁ*à•d*8c \AÁ; IÁ*]][|dĚÁ @ÁMP210 ||[-Á^•e^{A} Áæ•Á•○ç^|æÁåã-A\^}œÁ, ÁÁ JÉÁS]}•d`8cã}}; ² à^ I• È
- 3. MP210 ã Á^8[{ { ^} å^åÁ[| Á[[Á|[] ^• Á Á½KFGÁ | Á* l^æe^ | È
- 4. PR^acçā\fr\ee**^• ÊAd aneaaaaafa fr\ee*aa*fa aa aa fa aa
- 5. Ù`à•d`&č¦^Á; ˇ•ơਓà^Á;}Áæ;Á∿c^}Á;|æ;^Áç/;{Á׿ç^Á;Áã*^Á;Áæç[ãáÁ;æ;^|Ãá;Áæ;|Ãá;Áæ;Aí,€Æ;|Á;Áæ;Á;Áæ;Áæ;Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€Æ;|Aí,€
- 6. $\theta = \hat{A} \cdot \hat{A} \cdot$
- 7. Ø[¦Áj¦[]^¦Áæec^}^\Áæ]]|ä&æeã[}Ên^^ÁÚ¦[å*&æÂÔ@&\|ãcÈ
- 9. V@ Á§ -{ |{ aeaã} } Á§ Ás@áÁ; æ} *aelÁs Ás^|a^c,^åÁs Ás^Ás; ||^8c/ás} åÁsæ&&* | aee^È
- 10. $\triangle |$ $\Rightarrow \hat{a} \cdot \hat{b} |$ $\hat{a} \cdot \hat{b} = \hat{a} \cdot \hat{b} \cdot \hat{b} = \hat{b} \cdot \hat{b} \cdot \hat{b} = \hat{b} =$
- 11. 5 j c]X'fYglf]W¶b['l\ Y'\ Yfa U'Yl dUbg]cb'UbX'WcblfUW¶cb'cZ\ YMP210 dUbYg"f]Y. 8 c'bch'UHUW 'dUbY lc h\ Y'gi Vglfi Wi fY'UhVc\ '\ YYUj Y'UbX'f]X[Y'\c'<ck Yj YfzdUbYg'a i ghVY'UHUW YX'hc'\ Y'gi Vglfi Wi fY'UhcbY YbX'lc'dfYj Ybh\ Yfg`]X]b['Xck bg`cdY"
- 12. **MIP210** dUbYg'UiY'bchiXYg][bYX'hc'VY'k cf_'d'Uh7cfa g"Á0c̄;[ãiÁæ)^Á;}^&^••æ'^Á;[oÁdæ-æAÁ;] æ)^|•ÞÁQÁ;[c dæ-æAÁæ Á^* ā^åÞÁ;![o^&oÁœ-Á[[-Á;æ)^|•Áa^Á*•ā,*Á[-Á*[-Á*]*Á*@^•Áæ)åÁ;[{ ^Ác}]^Á,-Á[[-Á;æåÊơ{][|ˈæ*^Áa^&&\ÐÁ; æ], æÈ È
- 13. K 5 FB=B; .'@[\ hitfubga]ht]b['dubYg'UfY'bchXYg][bYX'cf']bhYbXYX'lc'VYUf'h\ Y'k Y][\ hcZubmidYfgcb k U'_]b[zghYdd]b[zghUbX]b['cf'fYgh]b['cb'h\ Ya "H<9'A5BI : 57 HI F9F'8=G7 @5=AG'5BM'K 5 FF5BHM'CF F9DF9G9BH5 H=CBz9LDF9GG'CF'=AD@98zh\ UhiUbmidYfgcb'WUb'gUzY'mik U'_zghYdzghUbX'cf'fYghcb'cf'bYUf h\ YgY'][\ hitfubga]ht]b['dubYg'cf'h\ Uhih\ YmWca d'mik]h\ 'Ubm'CG<5'fY[i 'Uh]cb"
- 15. ÁBB | åÁs cā *Á; Ác@ Á; æ) ^ | Ás @ * | åÁs ^Áæç [ãs ^å Á; @ | ^Á; [•• ãs | ^ÉQÁB | åÁs cā; *Ás Á^ ~ ã ^åÉs@ Á; æ) ^ | •Á; * oÁs ^ & cÁ; ã @ £ âs | ^ | És } ā ÉÉ; | Ás @ æ) Áṭ Á; | ^ç^ } oÁs * ^Á * æ; * ÉS c b c hW hih Y dub Y g 'k]h 'UVf Ug]j Y guk 'V'UXYgž [f]b XYfgž cf 'h cf W Yg"

751 H-CB

OE[]|a&eenā[}Ása)åÁs^•ā"}Ås^oenā|•Ása^Á;[¦Ásq|´°deenā[}Á;ˇ¦][•^•Á;}ſĒŠaa)åÁ;æÂ;[ơŚa^Ásq]¦[]¦[]¦ašeenÁ;[¦Ásq|Á^}çā[]{ ^}œa[}{ ^}œa[}*Ásq]*(];|āšeenÁ;[¦Ásq]*Á*);ēÄsq]åÁsa&son]æ¸á[;ákq]åÁsa&son]æ¸ákqa

IMPORTANT READ THIS FIRST

CAUTION

The use of any field seaming machine other than that provided by the manufacturer will damage the panels and void all warranties and will void all engineering data.

Low Floating System - With or without %" thermal spacer. See Insulation/Thermal Spacer Selection Chart below.

High Floating System - With %", %" or 1" thermal spacer. See Insulation/Thermal Spacer Selection Chart below.

Thermal calculations should be performed for each project to ensure that the thermal movement of the roof is not greater than the floating clip's capacity. Various densities of blanket insulation may affect the installation and or the appearance of a metal roof system. The installer is responsible for selecting the proper clip and thermal spacer for their conditions.

Insulation/Thermal Spacer Selection Chart							
Insulation Thickness Low System High System							
No Insulation	%" Thermal Spacer	High System Not Recommended					
3" Insulation	Thermal Spacer Not Recommended	%" Thermal Spacer					
4" Insulation	Thermal Spacer Not Recommended	⅓" Thermal Spacer					
6" Insulation	Low System Not Recommended	Thermal Spacer Not Recommended					

Warning

As with all standing seam roof systems, sound attenuation (example: blanket insulation) should be installed between the panels and open framing, such as purlins or joists, to prevent "roof rumble" during windy conditions.

Applications over solid deck such as rigid insulation over a metal deck or a wood deck may require additional acoustical consideration to ensure that thermal vibration noises are isolated from the building interior. This is especially important if the bottom of the deck is left open to the interior, in cathedral ceiling applications or when the attic space is used as a return air plenum.

A vapor retarder may be necessary to protect roofing components when high humidity is a factor. The need for a vapor retarder, as well as the type, placement and location should be determined by an architect or engineer. The following are examples of conditions that may require a vapor retarder: (A) a project where outside winter temperatures below 40 degrees F. are anticipated and where average winter interior relative humidity of 45% or greater is expected. (B) building usages with high humidity interiors such as indoor swimming pools, textile manufacturing operations, food, paper or other wet-process industrial plants. (C) Construction elements that may release moisture after the roof is installed, such as interior concrete, masonry or plaster work and fuel burning heaters.

Thermal Spacer Disclaimer

The above thermal spacer chart is intended to be used as a general guideline only. Because of the various densities of insulation currently available, the manufacturer cannot guarantee that this chart will be accurate in all situations. Further, the manufacturer does not specifically require that the roofing contractor use thermal spacers with it's roof system. However, please review the following information:

- · Although the manufacturer does not require a thermal spacer, the architect or building owner may.
- In certain environments, the compression of the fiberglass insulation, without a thermal spacer, may create a thermal break which can cause condensation to form on the purlins/joists.
- On uninsulated buildings, eliminating the thermal spacer: (1) may cause "roof rumble" and (2) you may encounter problems holding panel module.
- When a high clip is used without a thermal spacer: (1) you may encounter problems holding panel module and (2) foot traffic on the panel ribs may result in bent clips.
- Using a low clip with too much insulation or too thick of a thermal spacer: (1) may cause "purlin read" (2) may cause difficulty in properly installing the panel side laps, and (3) you may encounter problems holding panel module.

UNDERWRITERS LABORATORIES APPROVAL MP210

Construction Number	Panel Width (In.)	Gauge	Clip Type	Clip Spacing	Substrate	UL-2218 Impact Resistance	UL-263 Fire Rating	UL-580 Rating
90	18"	24 min.	*	5'-0 1/16"	Open Framing	Class 4	Class A	Class 90
176	18"	24 min.	N/A	5'-0 1/4"	Open Framing	Class 4	Class A	Class 90
180	18"	24 min.	**	5'-0 1/4"	Open Framing	Class 4	Class A	Class 90
238B	18"	24 min.	**	2'-6"	Composite System	Class 4	Class A	Class 90
437	18"	24 min.	**	5'-0"	Plywood	Class 4	Class A	Class 90
449	18"	24 min.	*	5'-0"	Open Framing	Class 4	Class A	Class 90
451	18"	24 min.	*	2'-0"	Composite System	Class 4	Class A	Class 90
452	18"	24 min.	*	2'-0"	Composite System	Class 4	Class A	Class 90
487	18"	24 min.	**	4'-0"	Composite System	Class 4	Class A	Class 90

^{*} Fixed or Floating (high or low)

NOTES:

- 1. Tests procedures are in accordance with Underwriters Laboratories Standard UL-580 under "Tests For Uplift Resistance of Roof Assemblies".
- 2. A detailed installation method is available for each Construction Number above and can be found in the UL Roofing Materials and Systems Directory. The panels must be installed in a certain manner to achieve the published results.
- 3. The panel qualifies for a Class A fire rating in compliance with Underwriters Laboratories Standard UL-263 when installed over a non-combustible substrate. A Class C fire rating can be obtained over a combustible deck.
- 4. The panel system qualifies under the following Fire Resistance Design Numbers: P225, P227, P230, P237, P265, P268, P508, P510, P512, P701, P711, P720, P722, P726, P731, P734, P801, P815, and P819. Refer to the UL Fire Resistance Directory for specific construction methods and hourly ratings.
- 5. MP210 panels carry a Class 4 rating under UL-2218 "Test Standard For Impact Resistance".

FACTORY MUTUAL APPROVAL

MP210


Panel Width	Gauge	Clip Type	Clip Spacing	Hail Damage Rating	ASTM E108 Fire Rating	FM Windstorm Rating
18	24	Floating	4'-0"	Class 1-SH	Class A	Class 1-90
18	22	Floating	5'-0"	Class 1-SH	Class A	Class 1-105
18	22	Floating	4'-0"	Class 1-SH	Class A	Class 1-135

NOTES:

- 1. Tests procedures are in accordance with Factory Mutual Research Corportion (FMRC) Standard 4471.
- 2. A detailed test report is available for each product above. The panels must be installed in a specific manner to achieve the published results. Contact Indiana Metal for more information.

^{**} Fixed or Floating (high, low, or utility)

MP210 Panel




SECTION PROPERTIES									
NEGATIVE BENDING POSITIVE BENDING							ING		
PANEL	Fy	WEIGHT	lxe	Sxe	Maxo	lxe	Sxe	Maxo	
GAUGE	(KSI)	(PSF)	(IN.4/FT.)	(IN.3/FT.)	(KIP-IN.)	(IN.4/FT.)	(IN.3/FT.)	(KIP-IN.)	
24	50	1.47	0.0756	0.0711	2.1307	0.1667	0.1025	3.0693	
22	50	1.83	0.1053	0.1027	3.0751	0.2231	0.1387	4.1551	

NOTES

- 1. All calculations for the properties of MP210 panels are calculated in accordance with the 2012 edition of the North American Specification For Design Of Cold-Formed Steel Structural Members.
- 2. Ixe is for deflection determination.
- 3. Sxe is for bending.
- 4. Maxo is allowable bending moment.
- 5. All values are for one foot of panel width.

MP210 Panel



ALLOWABLE UNIFORM LOADS IN POUNDS PER SQUARE FOOT


24 Gauge (Fy = 50 KSI)									
CDAN TVDE	LOAD TYPE		SPAN IN FEET						
SPAN ITPE	LOAD TIPE	2.5	3.0	3.5	4.0	4.5	5.0	5.5	
SINGLE	LIVE	216.0	180.0	154.3	127.9	101.0	81.8	67.6	
2-SPAN	LIVE	216.0	157.8	116.0	88.8	70.1	56.8	47.0	
3-SPAN	LIVE	216.0	180.0	144.9	111.0	87.7	71.0	58.7	
4-SPAN	LIVE	216.0	180.0	135.3	103.6	81.9	66.3	54.8	

22 Gauge (Fy = 50 KSI)									
ODAN TYPE	LOAD TYPE		SPAN IN FEET						
SPAN ITPE	LOAD ITPE	2.5	3.0	3.5	4.0	4.5	5.0	5.5	
SINGLE	LIVE	313.0	260.8	223.6	173.1	136.8	110.8	91.6	
2-SPAN	LIVE	313.0	227.8	167.4	128.1	101.2	82.0	67.8	
3-SPAN	LIVE	313.0	260.8	209.2	160.2	126.5	102.5	84.7	
4-SPAN	LIVE	313.0	260.8	195.3	149.5	118.2	95.7	79.1	

NOTES:

- 1. THE ABOVE LOADS ARE NOT FOR USE WHEN DESIGNING PANELS TO RESIST WIND UPLIFT.
- 2. Strength calculations based on the 2012 AISI Standard "North American Specification for the Design of Cold-formed Steel Structural Members."
- 3. Allowable loads are applicable for uniform loading and spans without overhangs.
- 4. LIVE load capacities are for those loads that push the panel against its supports. The applicable limit states are flexure, shear, combined shear and flexure, web crippling at end and interior supports, and a deflection limit of L/180 under strength-level loads.
- 5. Panel pullover and Screw pullout capacity must be checked separately using the screws employed for each particular application when utilizing this load chart.
- 6. The use of any field seaming equipment or accessories including but not limited to clips, fasteners, and support plates other than the provided by the manufacturer may (eave, backup, rake, etc.) damage panels, void all warranties and will void all engineering data.
- 7. This material is subject to change without notice. Please contact Indiana Metal for the most current data.

MP210 Panel




SECTION PROPERTIES									
NEGATIVE BENDING POSITIVE BENDING							ING		
PANEL	Fy	WEIGHT	Ixe	Sxe	Maxo	Ixe	Sxe	Maxo	
GAUGE	(KSI)	(PSF)	(IN.4/FT.)	(IN.3/FT.)	(KIP-IN.)	(IN.4/FT.)	(IN.3/FT.)	(KIP-IN.)	
24	50	1.38	0.0574	0.0538	1.6096	0.1324	0.0779	2.3324	
22	50	1.72	0.0794	0.0776	2.325	0.1779	0.1057	3.1654	

NOTES:

- 1. All calculations for the properties of MP210 panels are calculated in accordance with the 2012 edition of the North American Specification For Design Of Cold-Formed Steel Structural Members.
- 2. Ixe is for deflection determination.
- 3. Sxe is for bending.
- 4. Maxo is allowable bending moment.
- 5. All values are for one foot of panel width.

MP210 Panel



ALLOWABLE UNIFORM LOADS IN POUNDS PER SQUARE FOOT


24 Gauge (Fy = 50 KSI)								
SPAN TYPE	1 0 4 D TV/DE	SPAN IN FEET						
SPAN TYPE LOAD TYPE		2.5	3.0	3.5	4.0	4.5	5.0	5.5
SINGLE	LIVE	162.0	135.0	115.7	97.2	76.8	62.2	51.4
2-SPAN	LIVE	162.0	119.2	87.6	67.1	53.0	42.9	35.5
3-SPAN	LIVE	162.0	135.0	109.5	83.8	66.2	53.7	44.3
4-SPAN	LIVE	162.0	135.0	102.2	78.3	61.8	50.1	41.4

22 Gauge (Fy = 50 KSI)								
CDAN TYPE	LOAD TYPE	SPAN IN FEET						
SPAN TYPE	LOAD TYPE	2.5	3.0	3.5	4.0	4.5	5.0	5.5
SINGLE	LIVE	233.4	194.5	166.7	131.9	104.2	84.4	69.8
2-SPAN	LIVE	233.4	172.2	126.5	96.9	76.5	62.0	51.2
3-SPAN	LIVE	233.4	194.5	158.2	121.1	95.7	77.5	64.0
4-SPAN	LIVE	233.4	194.5	147.7	113.1	89.3	72.4	59.8


NOTES:

- 1. THE ABOVE LOADS ARE NOT FOR USE WHEN DESIGNING PANELS TO RESIST WIND UPLIFT.
- 2. Strength calculations based on the 2012 AISI Standard "North American Specification for the Design of Cold-formed Steel Structural Members."
- 3. Allowable loads are applicable for uniform loading and spans without overhangs.
- 4. LIVE load capacities are for those loads that push the panel against its supports. The applicable limit states are flexure, shear, combined shear and flexure, web crippling at end and interior supports, and a deflection limit of L/180 under strength-level loads.
- 5. Panel pullover and Screw pullout capacity must be checked separately using the screws employed for each particular application when utilizing this load chart.
- 6. The use of any field seaming equipment or accessories including but not limited to clips, fasteners, and support plates other than than provided by the manufacturer may (eave, backup, rake, etc.) damage panels, void all warranties and will void all engineering data.
- 7. This material is subject to change without notice. Please contact Indiana Metal for the most current data.

PRODUCT CHECKLIST

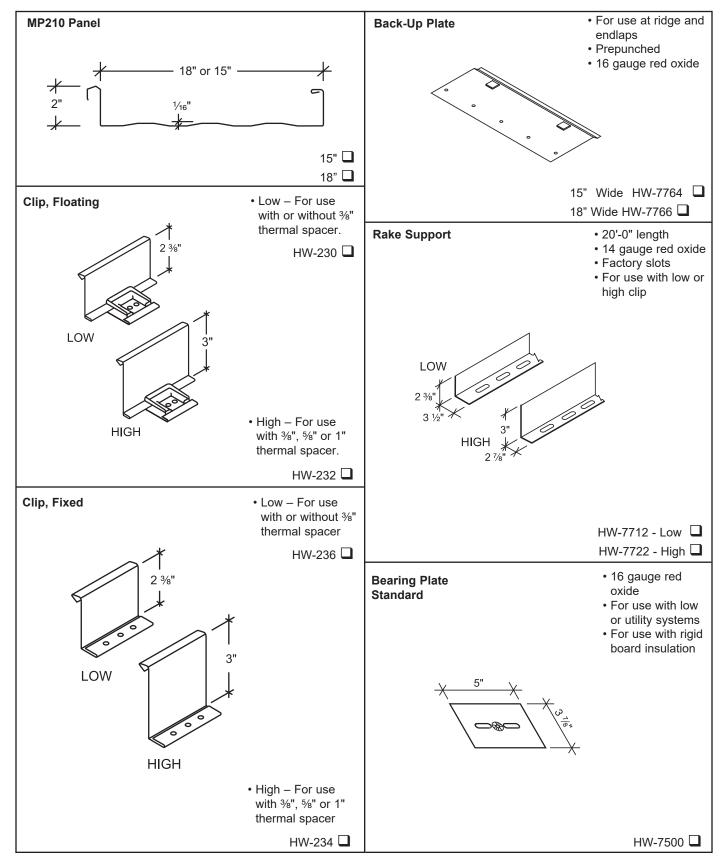


PRODUCT CHECKLIST

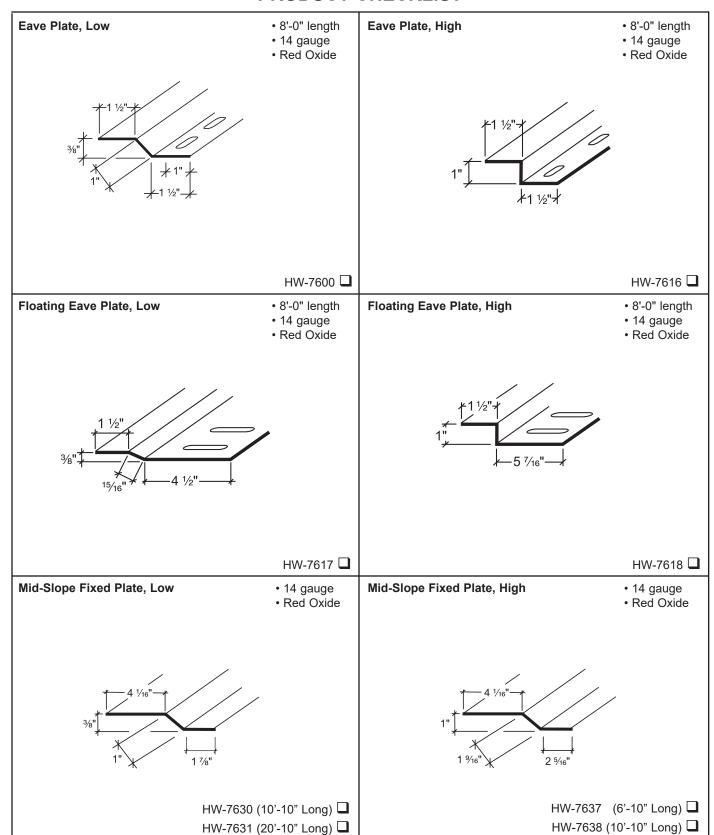

HW-7632 (6'-10" Long)

PRODUCT CHECKLIST


Valley Support Plate - Low Systems

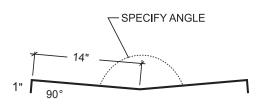

- Standard Width
- Use Over Purlins/Joists

10'-0" Long P-106


Extended Valley Support Plate - Low Systems

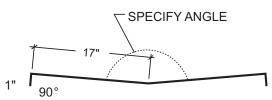

- Extended Width
- Use Over Purlins/Joists

10'-0" Long P-101 🖵


Valley Support Plate - High Systems



- Standard Width
- Use Over Purlins/Joists

10'-0" Long P-164 🔲


Valley Support Plate - High Systems

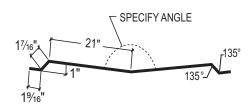

- · Extended Width
- Use Over Purlins/Joists

10'-0" Long P-162 🗖


Valley Support Plate - Low Systems



- Standard Width
- Use Over Rigid Insulation

10'-0" Long P-105 🖵


Valley Support Plate - Low Systems



- Extended Width
- Use Over Rigid Insulation

10'-0" Long P-100 🗖


Hip Support Plate - High or Low Floating Systems



Use Over Purlins/Joists


10'-0" Long P-141 🖵

Hip Support Plate - Low Floating Systems



- Use Over Solid Substrate
- 10'-0" Long P-140 🖵

Ridge/Hip Support Plate - Low Fixed Systems



· Use with all Substrates

10'-0" Long P-145

Ridge/Hip Support Plate - High Fixed Systems



- · Use with all Substrates
- 10'-0" Long P-155 🖵

PRODUCT CHECKLIST


• F	or use at valley when sing exposed fasteners or use with roof curbs	Thermal Spacer	 Polystyrene block used to increase the insulation capacity along the purlins
Triple Bead Tri-Bead	HW-502 ☐ • ¾₁6" x ⅓" x 25' • For use at eave, ridge, endlaps and trim connections HW-504 ☐	15 7/6"	3/8",5%", or 1" HW-583 3/8" □ HW-582 5/8" □ HW-581 1" □
Tape Sealer-Swaged	Panel Hemming Too	ol	Tube Sealant
HW-515 E		HW-602 □	Urethane (White) - HW-540 Urethane (Gray) - HW-541 Urethane (Bronze) - HW-542 Non-Skinning Butyl - HW-549
Outside Closure	• 24 gauge	Light Transmitting	, , , , , , , , , , , , , , , , , , ,
	• Painted 15" wide HW-446	(Reinforced) ‡	Std. Insulated - HW- 1803S Std. Uninsulated - HW-1802S UL 90 Insulated - HW-1801S
	18" wide HW-440 🔲		• UL 90 Uninsulated - HW-1800S

‡ It is the user's responsibility to ensure that the installation and use of all light transmitting panels comply with State, Federal and OSHA regulations and laws, including, but not limited to, guarding all light transmitting panels with screens, fixed standard railings, or other acceptable safety controls that prevent fall-through.

PRODUCT CHECKLIST

FL-201 🗖


Ridge Flashing



	PART NO.	ROOF PITCH	DIM. "A"	NOTE	
	FL-200	1/2-33/4:12	3½"	For use without ventilator	
	FL-202	313/16-6:12	4½"	18" Peak purlin spacing	
	FL-213	1/2-33/4:12	6½"	For use without ventilator 24" Peak purlin spacing	
ĺ	FL-214	313/16-6:12	7½"		

Floating Peak Box

- · Includes Cinch Angles and Flexible Membrane
- · Specify Roof Slope



FL-125 🖵


Length - 2'-1" Girth - 331/4"

• For use with FL-200, FL-202, FL-213, FL-214, FL-300, FL-302, FL-540 or FL-541 Ridge Flashing

FL-126 🔲


Length - 2'-6" Girth - 371/4"

• For use with FL-205, FL-207, FL-303, FL-304, FL-543 or FL-544 Ridge Flashing

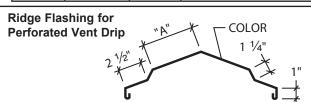

	PART NO.	ROOF PITCH	DIM. "A"	NOTE	
	FL-300	1/2-33/4:12	41/2"	For use with perforated vent drip (FL-254) 18" Peak purlin spacing For use with perforated vent drip (FL-254) 24" Peak purlin spacing	
	FL-302	313/16-6:12	5½"		
	FL-303	1/2-33/4:12	7½"		
ĺ	FL-304	313/16-6:12	81/2"		

Perforated Vent Drip

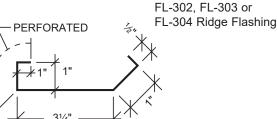


• Use with FL-300,

24 Gauge Material

FL-254 🔲

Zee Closure





24 Gauge Material

FL-361 🔲


COLOR

PART NO.	ROOF PITCH	DIM. "A"	NOTE
FL-209	1/2-33/4:12	6"	For use without vent
FL-211	313/16-6:12	7"	material 18" Peak purlin spacing
FL-212	All Pitches	11½"	For use without vent material 24" Peak purlin spacing

Ridge End Cap

Ridge/Hip Flashing - Fixed

• Specify Ridge to be used



and Roof Slope

PART NO. **ROOF PITCH** DIM. A FL-265 1/4-13/4:12 2" FL-265B 113/16-4:12 311/16"


COLOR 135° · Specify open hem when using with continuous cleat

102°

90° + ° of **ROOF SLOPE**

PRODUCT CHECKLIST





PART NO.	ROOF PITCH	DIM."A"	GIRTH
FL-248A	1/2-4:12	75/16"	23¾16"
FL-248B	4%16-6:12	715/16"	247/16"


• For use with Sculptured Gutter 10" 18 Gauge Material • FL-246

Gutter Ends Left or Right

- Use with all Sculptured or Style Gutters
- End Caps will be made to fit gutter ordered
- Specify left or right
- Specify gutter part number


FL-245 🔲

Sculptured Rake Trim




FL-111 🔲


Variable Termination



FL-117 🔲

Sculptured Eave Trim

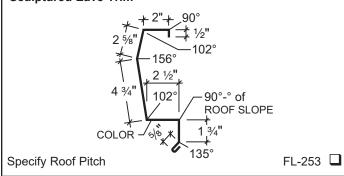




24 Gauge Material


FL-215 🔲

Eave with Extended Drip Edge

- \bullet Use with Roof Slopes $1\!\!/_2$ 6:12
- Specify open hem when using

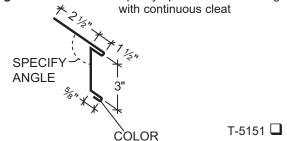


Box High Side Eave Trim



Specify Roof Pitch FL-331


Box Eave Trim



 Specify open hem when using with continuous cleat

FL-326 🔲

PRODUCT CHECKLIST

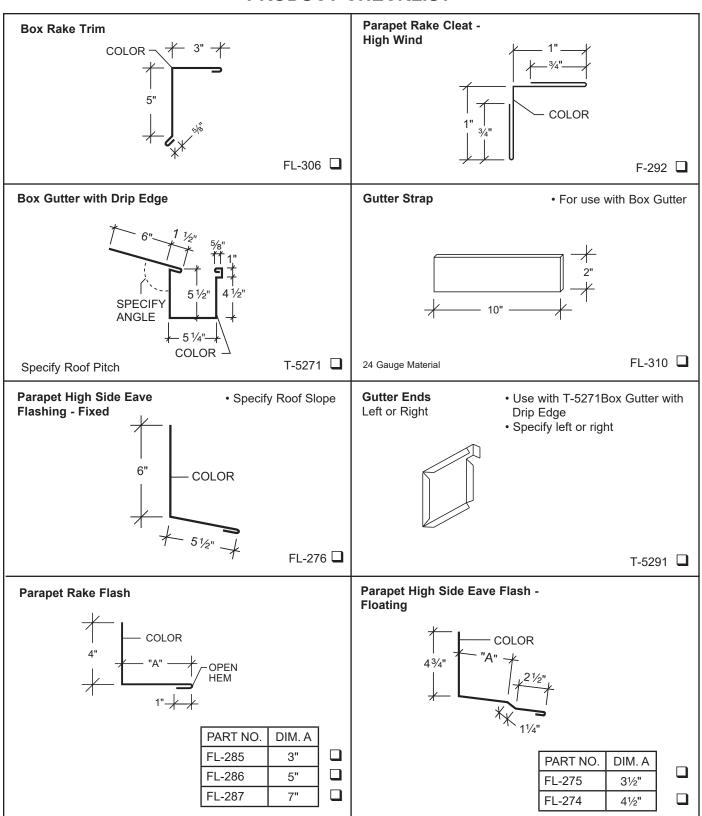

NOTE: All trim to be 26 gauge material unless noted. Refer to current price book for part numbers and descriptions.


PRODUCT CHECKLIST

Offset Cleat

24 Gauge Material

FL-337 🔲


Continous Cleat



24 Gauge Material

FL-338 🔲


Counter Flash



24 Gauge Material

FL-341 🔲


Alternate Counter Flash



24 Gauge Material

FL-343 🔲


Box Panel Cap Trim




Specify Roof Pitch

FL-272 🔲

Offset Panel Cap Trim



Standard Valley - Utility, Low and High Systems




24 Gauge Material

FL-705 🔲

FL-707 🔲

Extended Valley - Utility, Low and High Systems



24 Gauge Material

FL-711 🔲

FL-271 🔲

PRODUCT CHECKLIST

Fastener #1B

 Clip to purlin (Up to 4" insulation between panel and purlin)



1/4"-14 x 1 1/4" Self Driller 5/16" Hex Washer Head with no washer

Fastener #142


 Clip to purlin (Over 4" insulation between panel and purlin)



1/4"-14 x 1 1/2" Self Driller 5/16" Hex Washer Head with no washer

Fastener #2B

· Endlap over plywood



1/4"-14 x 1" Long Life AB
3/8" Hex Washer Head, with sealing washer

Fastener #5

- Rake support to purlin (Floating System Only)
- Floating eave plate to eave strut



1/4"-14 x 1 1/4" Shoulder Tek® 2 Self Driller 5/16" Hex Washer Head, with no washer

Fastener #1E




- Panel to eave plate or eave strut
- Rake trim to roof panel
- · Standard endlaps
- Panel to valley plate
- Outside closure to panel with back-up plate or support plate

1/4"-14 x 1 1/4" Long Life Self Driller 5/16" Hex Washer Head, with sealing washer

Fastener #2A

 Use in place of Fasteners #1E, #2B and #4 at all strip outs



17 x 1" Long Life AB 5/16" Hex Washer Head, with sealing washer


Fastener #6A

Clip to joist



12-24 x 1 ¼" Tek® 5 Self Driller 5/16" Hex Washer Head, with no washer

Fastener #4



- Ridge and other flashing to outside closure
- · Gutter to panel
- Gutter to strap
- Trim to trim connections
- Sculptured eave trim to panel

1/4"-14 x 1/8" Long Life Lap Tek® Self Driller 5/16" Hex Washer Head, with sealing washer

Fastener #11


- Special application fastener
- For attaching trim to masonary walls



1/4" x 1 1/4" Nail Drive Masonry Anchor

PRODUCT CHECKLIST

Fastener #12A




- · Rake angle to purlin
- · Hip and valley support plates to purlins
- Valley flashing to valley support plate

Fastener #13A

- · Offset cleat to plywood
- · Rake angle to plywood







12 x 1" #2 Phillips/Square Drive Pancake Type "A"

Fastener #14A


· Outside closure to angle on floating hip detail



Stainless Steel Pop Rivet 1/8" diameter x 3/8" grip range

12 x 1" #2 Phillips/Square Drive Pancake Head Driller






· Use at lower endlap of LTP's



· Trim to trim connections





Stainless Steel Pop Rivet 1/8" diameter x 3/16" grip range

Fastener #1



· Eave plate to eave strut

- · Mid-slope fixed plate to purlin
- · Rake support to angle (Fixed system only)

Fastener #226

· Dekstrip to Expansion Ridge/Expansion Lap



3/16" x 9/16" Rivet Cendalum Closed End Rivet

1/4"-14 x 1" Self Driller 5/16" Hex Head, with 5/8" O.D. washer

Fastener #18

- · Panel clips to wood deck
- Outside closure to panel over wood deck



· Panel endlaps over solid substrate

14 x 1" Type A




Fastener #46

1/4"-14 x 5%" Long Life Type B with washer



5/16" Hex Washer Head, with 5/8" O.D. washer

Deck Screw





· Dekstrip to Expansion Ridge/Expansion Lap




10 x 1/2" Aluminum Grommet Washer



Fastener #15D 14 x 6"



MP210 Panel Orientation

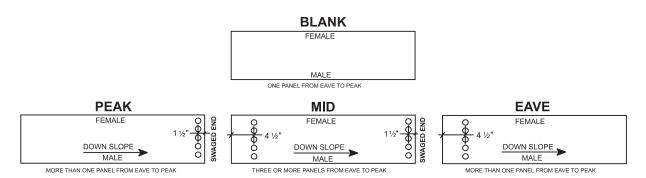



INSTALLATION GUIDELINES

- I. Jobsite Storage and Handling
 - A. Check the shipment against the shipping list.
 - B. Damaged material must be noted on Bill of Lading.
 - C. Panel crates should be handled carefully. A spreader bar of appropriate length is recommended for hoisting.
 - D. Check to see that moisture has not formed inside the bundles during shipment. If moisture is present, panels should be uncrated and wiped dry, then restacked and loosely covered so that air can circulate between the panels.
- II. Application Checklist
 - A. Check substructure for proper alignment and uniformity to avoid panel distortion.
 - B. Periodic check of panel alignment is crucial to proper panel alignment.
 - C. If there is a conflict between this manual and the project erection drawings, the erection drawings will take precedence.

III. LTP Warning

A. WARNING: Light transmitting panels are not designed or intended to bear the weight of any person walking, stepping, standing or resting on them. THE MANUFACTURER DISCLAIMS ANY WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, that any person can safely walk, step, stand or rest on or near these light transmitting panels or that they comply with any OSHA regulation.





SHEETING DIRECTION FOR ROOFS WITHOUT PANEL ENDLAPS SHEETING DIRECTION FOR ROOFS WITH PANEL ENDLAPS

PREPARATORY REQUIREMENTS

- 1. For the purpose of this manual, we have assumed that the MP210 roof will be installed over purlins and an eave gutter will be installed. Please refer to the Design Section of the manuals for details of MP210 over other substrates.
- 2. A rake angle or an alternate structural flat surface must be installed on top of the purlins to accept the rake support.
- 3. All primary and secondary framing must be erected, plumbed and squared with bolts tightened according to accepted building practices.
- 4. The substructure (eave to ridge) must be on plane (\(\lambda'\)" in 20' or \(\frac{3}{8}\)" in 40' tolerance).
- 5. It is critical that the purlins or bar joists at the ridge and endlaps be located exactly as detailed and that they are straight from rafter to rafter. Any mislocation or bowing of these members can cause the fasteners at the ridge or endlaps to foul as the panels expand and contract.
- 6. The manufacturer recommends the use of a screw gun with a speed range of 0-2000 RPM to properly install all fasteners referenced in this manual. Tools rated to 4000 RPM should never be used for self drilling fasteners typically supplied with metal roof and wall systems.
- 7. Field cutting of the panels should be avoided where possible. If field cutting is required, the panels must be cut with nibblers, snips, or shears to prevent edge rusting. Do not cut the panels with abrasive saw blades, grinders, or torches.

CAUTION

Avoid restricting the thermal expansion and contraction of the MP210 panels. (i.e., Do not attach panel to the substructure at either the eave and ridge.)

WARNING: Light transmitting panels are not designed or intended to bear the weight of any person walking, stepping, standing or resting on them. THE MANUFACTURER DISCLAIMS ANY WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, that any person can safely walk, step, stand or rest on or near these light transmitting panels or that they comply with any OSHA regulation.

NOTE

It is the responsibility of the erector to install this roof using safe construction practices that are in compliance with OSHA regulations. The manufacturer is not responsible for the performance of this roof system if it is not installed in accordance with the instructions shown in this manual. Deviations from these instructions and details must be approved in writing by the manufacturer.

CAUTION

Diaphragm capabilities and purlin stability are not provided by the MP210 roof system. Therefore, other bracing may be required.


WRONG WAY

UNLOADING

Upon receiving material, check shipment against shipping list for shortages and damages. The manufacturer will not be responsible for shortages or damages unless they are noted on the shipping list.

Each bundle should be lifted at its center of gravity. Where possible, bundles should remain banded until final placement on roof. If bundles must be opened, they should be retied before lifting.

When lifting bundles with a crane, a spreader bar and nylon straps should be used. **NEVER USE WIRE ROPE SLINGS, THEY WILL DAMAGE THE PANELS.**

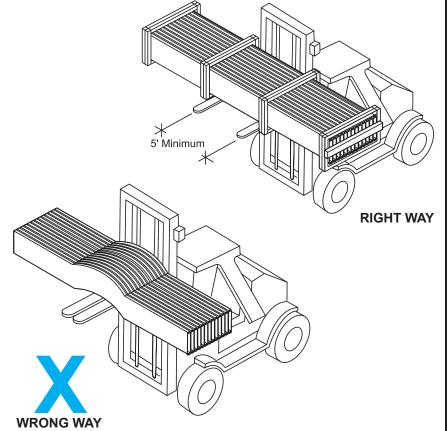


When lifting bundles with a forklift, forks must be a minimum of five feet apart. Do not transport open bundles. Drive slowly when crossing rough terrain to prevent panel buckling.

CAUTION


Improper unloading and handling of bundles and crates may cause bodily injury or material damage. The manufacturer is not responsible for bodily injuries or material damages during unloading and storage.

UNLOADING (Continued)

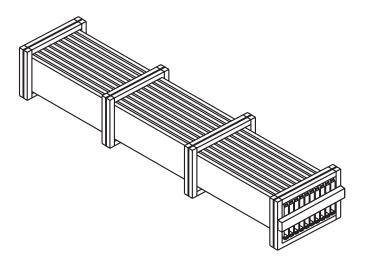

BLOCK AND BAND

This method of bundling is used for orders that are to be picked up by the customer or shipped by common carrier. 2 x 4's are strapped under the bundles to allow access for straps or a forklift. Bundles less than 25' long may be handled by a forklift. The forklift should have at least 5' between forks. Bundles longer than 25' should be lifted utilizing a spreader bar with nylon straps.

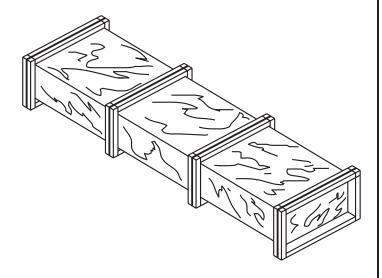

FULL CRATE

This method is used on all overseas shipments or by customer's order. Handling requirements are the same as block and band.

RIGHT WAY WRONG WAY


HANDLING/PANEL STORAGE

Standing on one side of the panel, lift it by the seam. If the panel is over 10' long, lift it with two or more people on one side of the panel to prevent buckling.

Do not pick panels up by the ends.

NOTE:

Protective gloves and safety glasses should always be used while handling panels. OSHA safety regulations must be followed at all times.

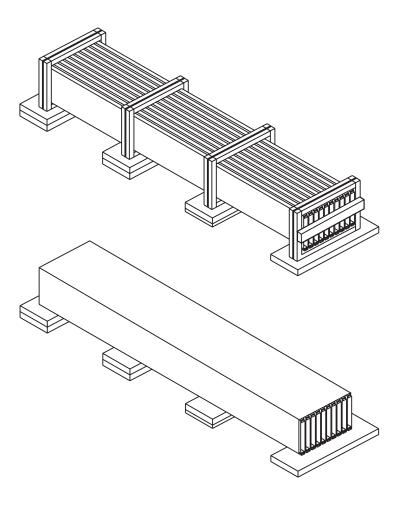

Store bundled sheets off the ground sufficiently high to allow air circulation beneath bundle and to prevent rising water from entering bundle. Slightly elevate one end of bundle. Prevent rain from entering bundle by covering with tarpaulin, making provision for air circulation between draped edges of tarpaulin and the ground. PROLONGED STORAGE OF SHEETS IN A BUNDLE IS NOT RECOMMENDED. If conditions do not permit immediate erection, extra care should be taken to protect sheets from white rust or water marks.

Check to see that moisture has not formed inside the bundles during shipment. If moisture is present, panels should be uncrated and wiped dry, then restacked and loosely covered so that air can circulate between the panels.

PROPER HANDLING, STORAGE AND MAINTENANCE OF PAINTED AND GALVALUME PLUS® PANELS PANEL HANDLING

- · All panel bundles must be inspected during unloading and carrier advised immediately if damage is noted.
- Never unload or move panel bundles that have been opened without adequately clamping them. Without the banding to hold the bundle stable, panels may shift during unloading or movement, causing the bundle to fall.
- · Never use wire slings to unload or move panel bundles.
- When unloading or moving panel bundles over 20' long, a spreader bar may be required. It is the erector's responsibility to determine the location and number of lift points required to safely unload or move panel bundles.
- · When handling individual panels, always wear protective gloves. OSHA safety regulations must be followed at all times.
- When cutting panels, always wear all required safety equipment such as safety glasses and gloves. Cut panels with
 nibblers, shears or snips. Do not use abrasive blade saws as these will melt the Galvalume[®] coating causing the panel to
 edge rust which will void the Galvalume[®] and Paint warranties. Drilling fasteners into panels will create metal filings that
 will rust and create an unsightly stain. Metal filings must removed by sweeping or wiping down panels immediately after
 installation to avoid this occurrence.

PANEL STORAGE

- If water is permitted to enter panel bundles, it is necessary to open bundles, separate the panels and dry all surfaces.
- Store bundled panels off the ground sufficiently high to allow air circulation beneath bundle and to prevent rising water from entering bundle. Slightly elevate one end of bundle.
- Prevent rain from entering bundle by covering with tarpaulin, making provision for air circulation between draped edges of tarpaulin and the ground.
- Prolonged storage of panels in a bundle is not recommended. If conditions do not permit immediate erection, extra care should be taken to protect panels from white rust or water marks. If panels have not been erected within three weeks of receipt, the panels should be removed from the bundle for inspection. Condensation may cause damage to panels. The manufacturer's Paint and Galvalume[®] warranties do not cover damage caused by improper panel storage.

PANEL MAINTENANCE

- Never allow Galvalume[®] panels to come into contact with or water runoff from dissimilar materials such as copper, lead, or
 graphite. These materials will cause galvanic corrosion of the panels and will void the Galvalume[®] warranty. This includes
 treated wood and AC condensate, both of which contain copper compounds. This also applies to painted panels.
- Always use long life fasteners in all exposed fastener applications. Non long life fasteners can rust through the panel at
 each exposed fastener location. Use of non long life fasteners in exposed applications will void the Galvalume[®] and Paint
 warranties.
- Panels should be protected against exposure to masonry products, strong acids or bases and solvents. Exposure to these
 agents may etch or stain Galvalume Plus[®] panels and cause painted panels to blister or peel.
- Never allow anyone to apply any coating or patching material to the panel surface. These products may contain chemicals
 that will adversely affect the Galvalume Plus[®] or paint coating. Also, water may become trapped between the coating
 material and the panel, causing premature corrosion.


If you have any question as to proper methods to use in the handling, storage or maintenance of these panels, call your nearest manufacturer representative.

Never allow anyone to apply any coating or patching material to the panel surface. These products may
contain chemicals that will adversely affect the Galvalume Plus[®] or paint coating. Also, water may become
trapped between the coating material and the panel, causing premature corrosion.

If you have any question as to proper methods to use in the handling, storage or maintenance of these panels, call your nearest manufacturer representative.

NOTICE


Uniform visual appearance of Galvalume Plus® coated panels cannot be guaranteed. The Galvalume Plus® coating is subject to variances in spangle from coil to coil which may result in a noticeable shade variation in installed panels. The Galvalume Plus® coating is also subject to differential weathering after panel installation. Panels may appear to be different shades due to this weathering characteristic. If uniform visual appearance is required, the manufacturer recommends that our prepainted Signature® 200 or Signature® 300 panels be used in lieu of Galvalume Plus®. Shade variations in panels manufactured from Galvalume Plus® coated material do not diminish the structural integrity of the product. These shade variations should be anticipated and are not a cause for rejection.

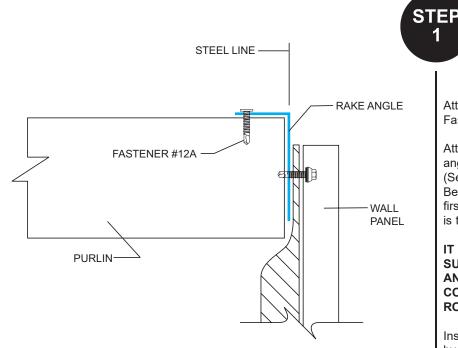

RAKE ANGLE ATTACHMENT

FLOATING SYSTEM

FASTENER #5

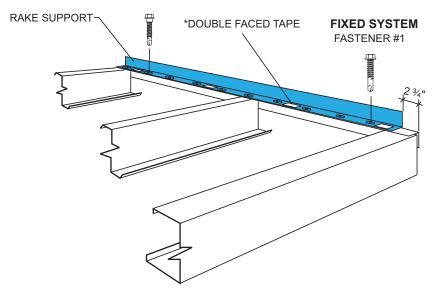

RAKE SUPPORT ATTACHMENT

RAKE ATTACHMENT

Attach the rake angle to the purlin with the Fastener #12A.

Attach the rake support on top of the rake angle with the proper self-drilling fasteners (See "Rake Support Fastener Requirements" Below) on 2'-0" centers with a fastener in the first and last prepunched slot. The vertical leg is to be installed flush with the steel line.

IT IS IMPORTANT THAT THE RAKE SUPPORT IS INSTALLED STRAIGHT AND SQUARE WITH THE EAVE AS IT CONTROLS THE ALIGNMENT OF THE ROOF SYSTEM.


Install 6" long pieces of double faced tape (not by Manufacturer) on 3'-0" centers to the top of the horizontal leg of the rake support. This will help hold the insulation in place at the rake.

RAKE SUPPORT FASTENER REQUIREMENTS


- Fixed System Fastener #1
- Floating System Fastener #5

CAUTION (For Floating Systems Only)


It is important that shoulder fasteners are installed through the CENTER of the slotted holes of the rake support to allow for expansion and contraction.

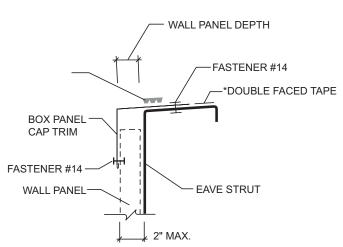


WALL PANEL INSTALLED BEFORE ROOF

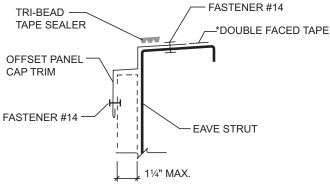

WALL PANEL INSTALLED BEFORE OR AFTER ROOF

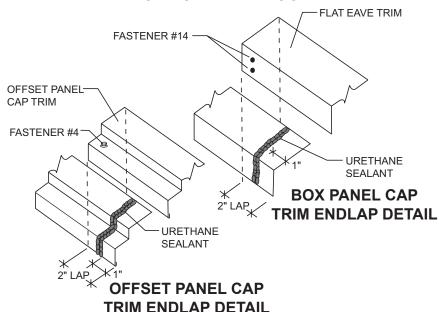

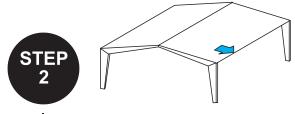

LOW SYSTEM EAVE


For applications in which the wall panels have already been erected, install box panel cap trim or offset panel cap trim to the eave strut with Fastener #14. Eave trim must be pulled tight to wall panels with Fastener #14 before fastening to eave strut. For applications in which the wall panels have not been erected, use offset panel cap trim. If using panel cap trim, it will space itself for the wall offset panels. Use three Fastener #14 per trim piece.

Install Tri-Bead tape sealer along top of the trim


For vinyl insulation, install double faced tape (not by Manufacturer) along the length of the top leg of the trim. Double faced tape must be upslope from Tri-Bead tape sealer.

Lap trim 2". Apply two beads of urethane sealant between the trim pieces, approximately 1" from the end of the bottom piece. Attach trim laps in flat eave trim with Fastener #14. Attach trim laps on panel cap trim with Fastener #4.


*Not by Manufacturer

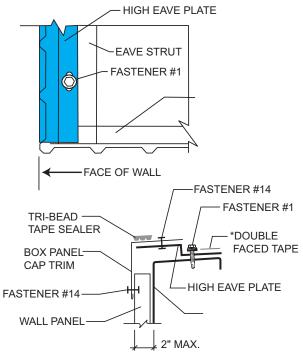

FLAT EAVE TRIM DETAIL (WITHOUT GUTTER)

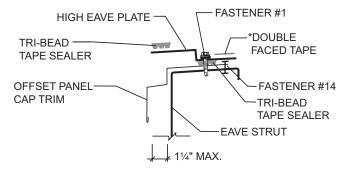


OFFSET PANEL CAP TRIM DETAIL (WITH GUTTER)

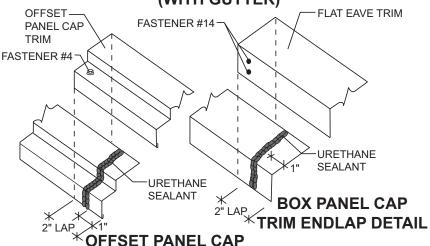

TRIM ENDLAP DETAIL

*Not by Manufacturer

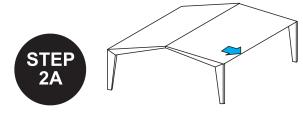

HIGH SYSTEM EAVE

Wall Panels Installed Before Roof

Install high eave plates flush with the outside face of the high crowns of the wall panels. Install Fastener #1 in prepunched slots (1'-0" on center) of the eave plate. The first eave plate will butt against the rake support. All of the eave plates may be installed at this time.

Be sure to butt each eave plate end to end without leaving a gap between the plates. Place an 8" length of Triple Bead tape sealer at each butt joint.

Install box panel cap trim to the top of the eave plates. Check to make sure the trim is flat against the wall. Attach the trim to the eave plate and the wall panel with a Fastener #14 at 10'-0" centers.

Lay Tri-Bead tape sealer across the top of the eave trim, flush with the outside edge.

For vinyl back insulation, install double faced tape (not by manufacturer) along the length of the bottom of the eave plate. Double faced tape must be upslope from the Tri-Bead tape sealer.

Wall Panels Installed After Roof

Install offset panel cap trim to the eave strut and wall panel with Fastener #14 at 10'-0" centers. Use three fasteners per trim piece.


Install high eave plates flush with the outside of the offset panel cap trim. Install Fastener # 1 in each prepunched slot (1'-0" on center) of the eave plate. The first eave plate will butt against the rake support. All of the eave plates may be installed at this time


Lay Tri-Bead tape sealer under the eave plate on top of the offset panel cap trim.


Be sure to butt each eave plate end to end without leaving a gap between the plates. Place an 8" length of Triple Bead tape sealer at each butt joint.

Lay Tri-Bead tape sealer across the top of the eave plates, flush with the outside edge. For vinyl back insulation, install double faced tape (not by manufacturer) along the length of the bottom leg of the eave plate.


Lap trim 2". Apply two beads of urethane sealant between the trim pieces, approximately 1" from the end of the bottom piece. Attach trim laps in flat eave trim with Fastener #14. Attach trim laps on panel cap trim with Fastener #4.

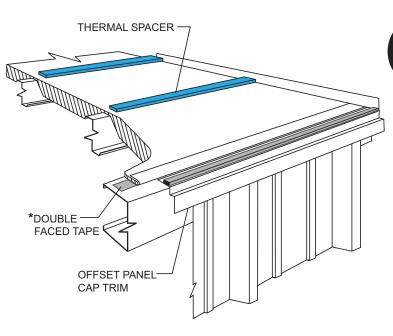

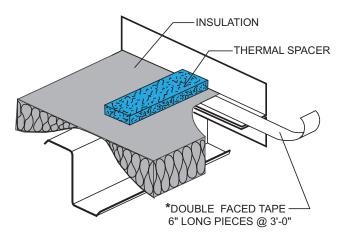

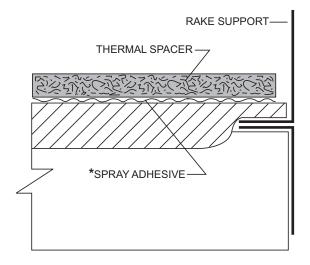


STEP 3





THERMAL SPACER (FOR HIGH SYSTEM ONLY)

Position the thermal spacer on top of the insulation over each purlin and against the rake support prior to installing the roof panel.

Using spray adhesive, (not by manufacturer), adhere the thermal spacer to the insulation (First Panel Run Only). The thermal spacer increases the insulation capacity along the purlins.

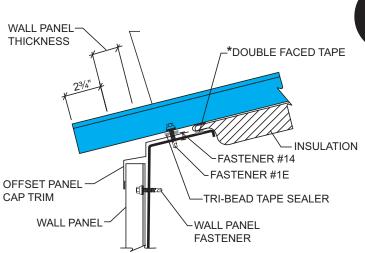


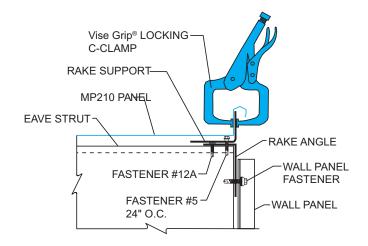

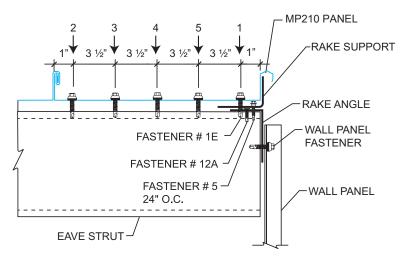

FASTENING PATTERN AT EAVE

*Not by Manufacturer



FIRST PANEL


Position the panel so that it overhangs the eave strut by the dimension shown on the building drawings. The upper end of the panel must extend 7" beyond the web of the purlin if the panel covers eave to ridge. If more than one panel is required to cover eave to ridge, one or more endlaps will be required. The upper end of the panel will extend 10" beyond the web of the purlin at endlaps.


NOTE:

If an endlap is required then roof panel must be sheeted right to left as viewed from the eave looking toward the ridge.


Lay the female leg of the panel over the rake support. To prevent wind damage, secure the female leg of the panel to the rake support with Vise Grip[®] Locking C-Clamps or temporary fasteners. Fasteners must go through the rake support. The panel will not be fastened permanently to the rake support until the rake trim is installed.

Attach the panel to the eave strut or eave plate with Fastener #1E. Five fasteners are required at this location.

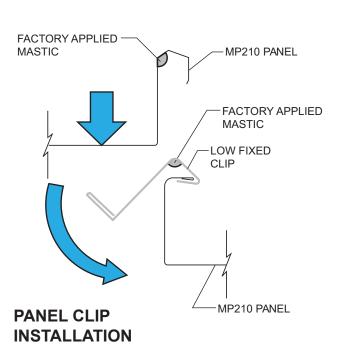


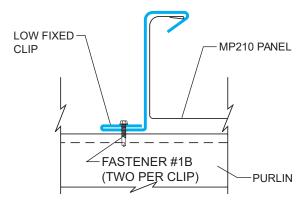

RIGHT WAY

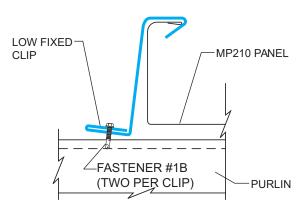

WRONG WAY

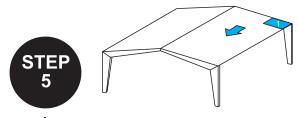

CLIP INSTALLATION

Hook the panel clip onto male leg of panel. Hold end of clip up to keep it engaged onto male leg and rotate the clip base down to completely engage clip onto male leg. Install panel clips at each purlin.

Before fastening clip to purlins, check to ensure that vertical leg of clip is tight to the vertical leg of the panel. Failure to keep this leg tight to the panel leg will affect panel module.


CLIP FASTENER REQUIREMENTS

Two fasteners per clip


Purlins - Fastener #1B - Up to 4" Insulation Fastener #1F - Over 4" Insulation Bar Joists - Fastener #6A

CAUTION

The panel clip has factory applied mastic in the upper lip. This mastic is compressed when the clip is rotated in place. If, for some reason, a clip must be removed, a new clip must be used.

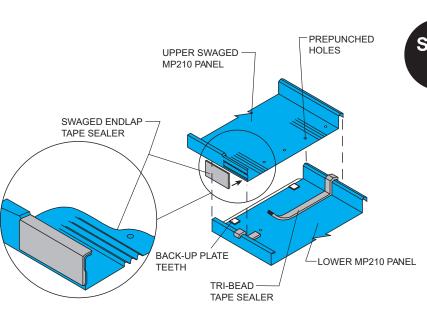


PANEL INSTALLATION SEQUENCE

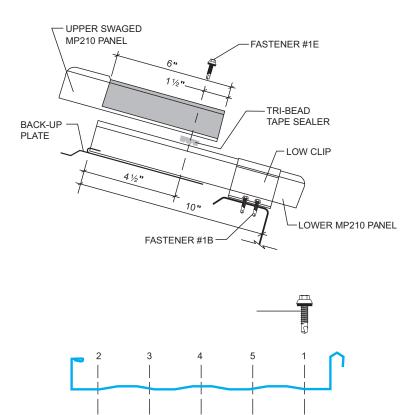

FASTENER SEQUENCE





ENDLAP-PANEL

NOTE:

Step 6 applies only where more than one panel is used in a single slope.


Slide a prepunched back-up plate onto the upslope end of the bottom panel. Make sure the teeth on top of the back-up plate are on top of the panel. Visually check to ensure that the prepunched holes in the back-up plate are aligned with the prepunched holes in the panel. At upslope end of bottom panel, install Tri-Bead tape sealer across entire width of panel. Tape sealer must be centered over prepunched holes in panel. Apply swaged endlap tape sealer to swaged vertical male leg of upper panel. Pigtail portion of tape sealer must lap over vertical leg of panel.

Using an awl to align the prepunched holes, install upper panel by nesting it over the lower panel for 6". Rotate the male leg of the upper panel under the male leg of the bottom panel, then force the female leg of the upper panel down onto the female leg of the bottom panel. Install Fastener #1E in the prepunched holes in the proper sequence. Install clips as outlined in Step 5.

Repeat this endlap procedure as required until ridge is reached.

NOTE:

If you are using 15" MP210 panels, they are not prepunched for endlaps. Use Triple Bead Tape Sealant at endlaps with 15" wide panels.

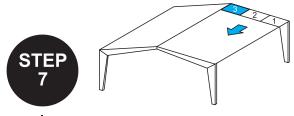



RIDGE

At the ridge, the panel should extend 7" past the web of the peak purlin.

At the ridge install a back-up plate as outlined in Step 6.


Install clips as outlined in Step 5.

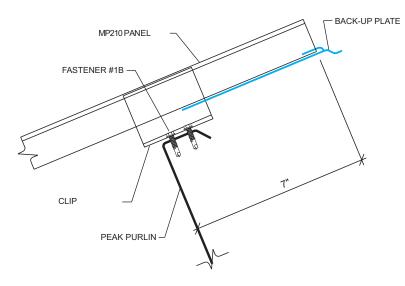

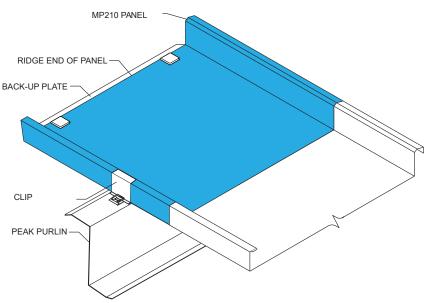

PANEL END SEALANT DETAIL AT RIDGE






MP210 PANEL MP210 PANEL TRAKE SUPPORT FASTENER #5 RAKE ANGLE TRI-BEAD TAPE SEALANT FASTENER #12A FASTENER #12A FASTENER #12A FASTENER #12A

SUBSEQUENT RUNS EAVE

Apply urethane sealant to the male leg of the first panel directly over the Tri-Bead tape sealer at the eave. This will prevent water infiltration through the end of the panel seam.

Position the next panel with the female leg over the male leg of the previous panel with panel ends flush.

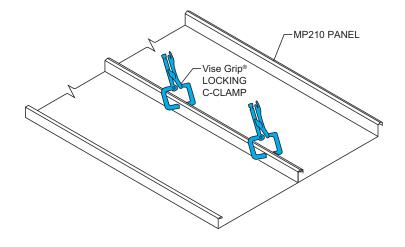

Clamp the panel seam together at both ends. Long panels may require one or more clamps in the middle. This will help hold panel module.


Install fasteners at eave as outlined in Step 4.

Install clips as outlined in Step 5.

Crimp panel seam at all clip locations with hand crimping tool. Panels should be fully seamed with electric seamer as quickly as possible after a section of the roof is completed.


CAUTION

Panel must be crimped at all clip locations as they are installed to provide temporary wind resistance.

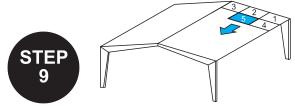


SUBSEQUENT RUNS ENDLAP


Install endlap panels as outlined in Step 6.

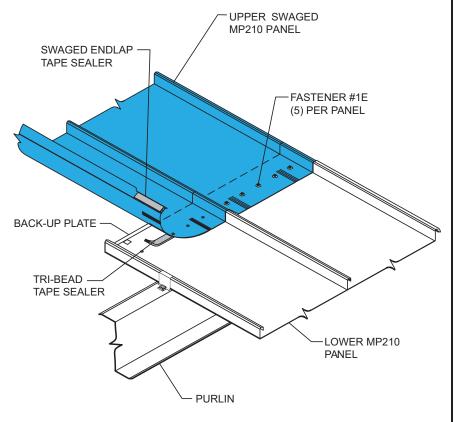

Install clips as described in Step 5.

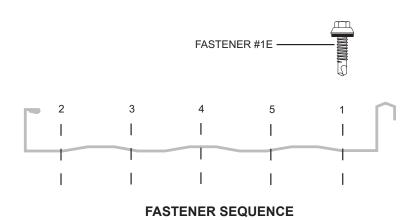



Repeat endlap procedures as required until ridge is reached.

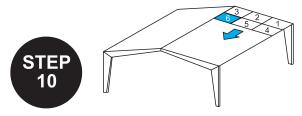


SUBSEQUENT RUNS RIDGE

Install back-up plate and clip as outlined in Step 7.

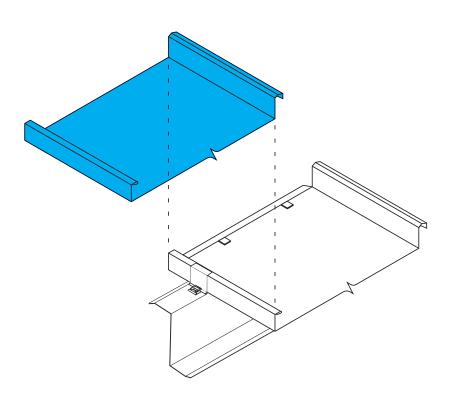

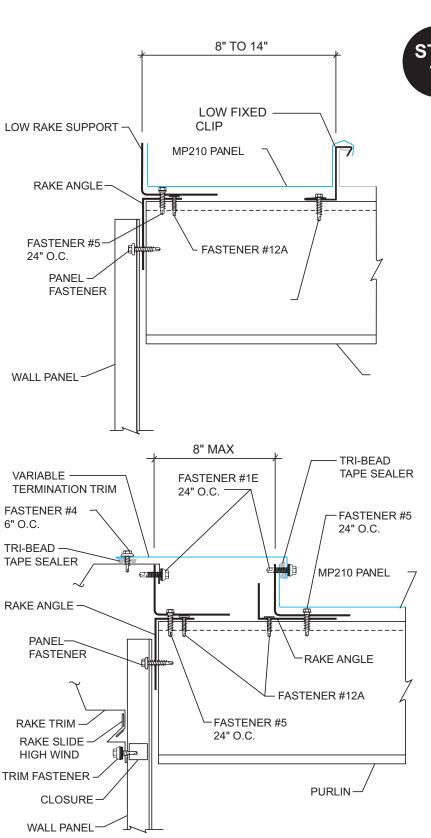



LAST PANEL RUN

Install rake support at the finishing end of the roof as outlined in Step 1.


FINISHING DIMENSION RUN OF 8" TO 14"

Field cut and bend a 2" tall vertical leg on the panels in the last run of roof. The vertical leg must be tight to the rake support angle. Secure the vertical leg to the rake support angle with clamps or temporary fasteners. At the endlap and ridge, a partial back-up plate must be cut.

FINISHING DIMENSION RUN OF LESS THAN 8"

If the width of the last panel run is 8" or less, a second run of rake support angle must be installed for attachment of the vertical leg of the panel. A variable termination trim will be required to seal the gap between the vertical leg of the panel and the rake trim.

The male leg of the panel and the termination trim must be field cut to fit the condition.

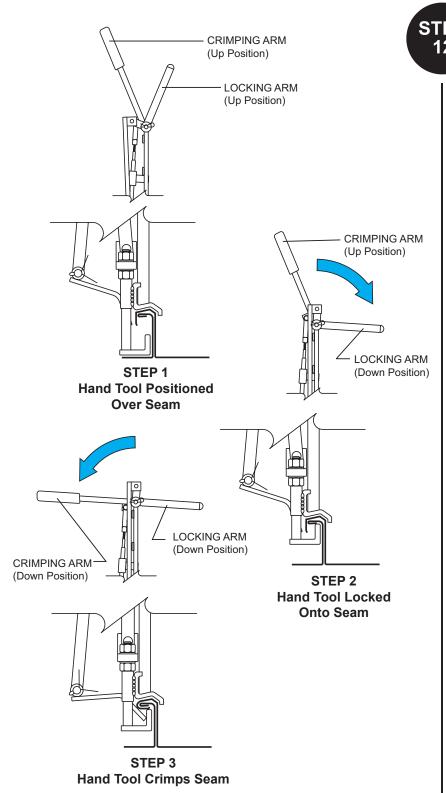



SEAMING OPERATION


As panels are installed, hand crimp at each clip location with the hand crimper. Panels should be completely seamed with the electric seamer as soon as possible.

Push locking arm down to lock crimper onto seam. If difficulty is encountered, check to make sure that the hand crimper is properly alighned on seam. **Do not force locking arm.**

Push crimping arm down to crimp panel. Return both the crimping arm and locking arm to the up postion and remove tool from seam.

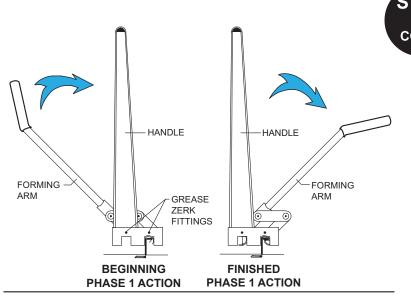

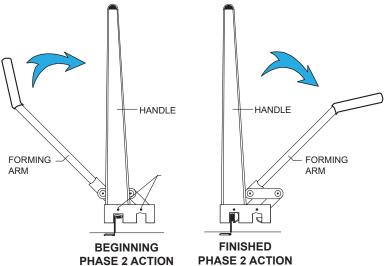

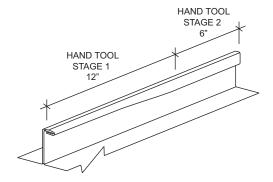

SEAMING OPERATION (Continued)

CAUTION

It is critical that the panel seams are crimped and folded as shown before using the electric seamer. Failure to follow these guidlines will result in damaged seams.


To begin seaming with hand tool, set the hand tool on the seam making sure seam is in the **PHASE 1 Action** slot. Align the edge of the hand tool with the end of the panel. Rotate the forming arm under the handle to produce 6" of **PHASE 1** seam. This should be done three times along the seam for a total of 18".

Return to the end of the panel to begin PHASE 2 Action. Set hand tool onto seam making sure seam is in the PHASE 2 Action slot. Align the edge of the hand tool with the edge of the panel. Rotate the forming arm under the handle to produce 6" of finished PHASE 2 seam. This should be done once per rib. The relationship of this 6" of finished seam to the 18" of crimped seam is critical to the proper alignment of the rolls in the electric seamer.

NOTE

All grease zerk fittings on the hand tool should be greased with lithium based grease daily.


The seam is now ready to accept the electric seamer.

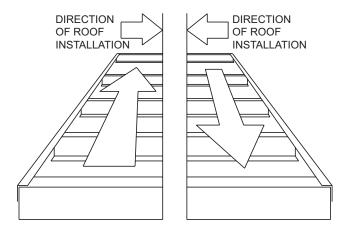




SEAMING OPERATION (Continued)

The electric seamer will run in one direction only. To determine the direction of the seamer, stand at the eave and look upslope. If the roof is being installed left to right, the seamer will run upslope. If the roof is being installed right to left, the seamer will run downslope, An orientation plate is on the seamer to assist you in placing the seamer onto the seam properly. When the roof has endlaps, the panels will always be installed right to left. When the roof slope is 6 on 12 or greater, panels must run right to left.

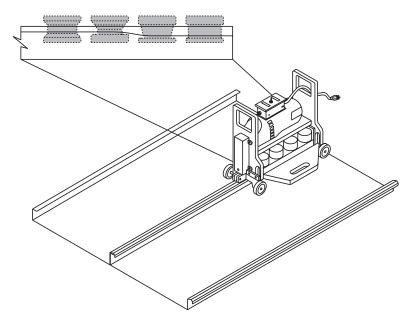

To begin seaming, set seamer on seam with the locking bar up and to the open side of the seam. The rear wheels should be even with the edge of the roof panel. Push the locking bar down to engage the rolls and turn the seamer on.

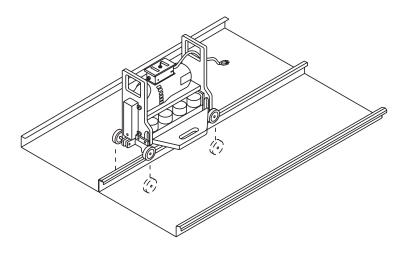

Stop seamer about one foot from end of panels. Disengage locking bar and remove the electric seamer. Finish seam with hand tool.

CAUTION

- Seamer operation should be closely supervised at all times.
- · A safety line should be attached to the seamer.
- Do not entangle the electrical cords in the seamer tooling while it is in operation. This could cause serious injury or death to the operator and severely damage the seamer.
- Electrical cords should be 10-gauge to provide power to the seamer and never be over 200 feet from the electrical source.






DOWN


OUTSIDE CLOSURE INSTALLATION

Panels must be seamed before closures can be installed. Install Tri-Bead tape sealer across full width of panels, including under panel seams at ridge. Center of tape sealer should be 1 ½" from end of panels.

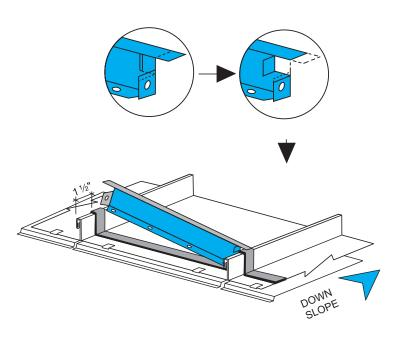


Field cut the end of the outside closure that fits to the open side of the panel seam. Notch and bend the vertical leg of the closure above the end tab back to the dimple formed into the closure. It is important that the closures fit tight to the panel seams to prevent the need for excess urethane sealant at this location.

Install outside closures by rotating the end cut for the panel seam into place first. Then rotate the other end of the outside closure into place. The vertical leg of the outside closure should be 2" from the upslope end of the panel. Attach the outside closure to the panel with Fastener #1 at each prepunched hole in the closure. Before installing the next outside closure, install a piece of Tri-Bead tape sealer onto the top flange of the outside closure previously installed. This is to prevent water being blown between the outside closures where the top flanges overlap. After all closures are in place, install Tri-Bead tape sealer across the top flange.

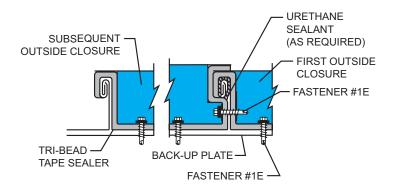

Use urethane sealant to fill any voids around the panel seams on the upslope side of the outside closures.

UL 90 LIGHT TRANSMITTING PANEL INSTALLATION

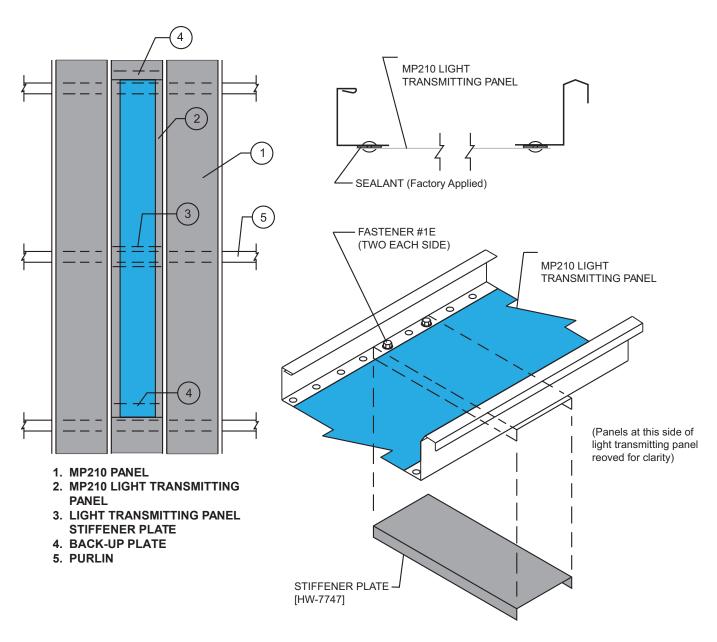


NOTES:

- 1. Maximum width of purlin flange to be 3 ½".
- 2. Stiffener plate is to be field installed on bottom side of light transmitting panel over mid-purlin.
- 3. Light transmitting panel rivets that obstruct stiffener plate must be drilled out and replaced with Fastener #1E. Minimum two fasteners per side.
- 4. Stiffener plate must be centered exactly over mid-purlin so that thermal movement of the system is not restrained by the purlin.
- 5. Endlaps created by the use of light transmitting panels require roof erection to proceed from right to left as viewed from the eave looking toward the ridge.

RIVETED RAIL LTP INSTALLATION


STEP 1

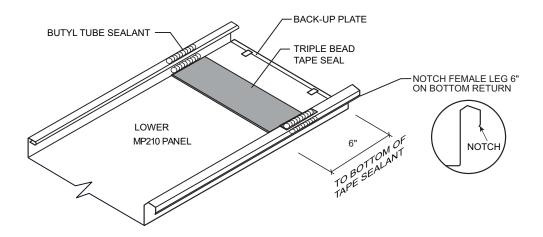

LOWER BATTENLOK HS PANEL

- 1. Install Back-up plate on lower panel.
- 2. Install Triple Bead Tape as shown on lower panel.
- 3. Install Butyl Sealant as shown up the vertical legs and over the male and female seam.

STEP 2

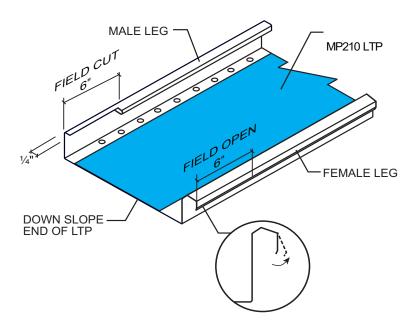


DOWN SLOPE END OF LTP

- 1. Field cut male leg 6" as shown.
- 2. Field open female leg 6" to allow panel lap to engage.

RIVETED RAIL LTP INSTALLATION (cont'd.)


STEP 3

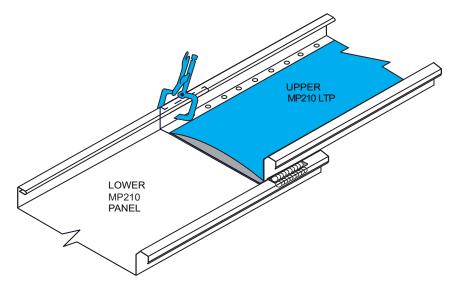

UPPER AND LOWER PANELS

- 1. C-clamp both vertical male legs together prior to rotating upper panel into place.
- 2. Lift LTP up slightly in center of panel to help get male and female legs to nest properly.

STEP 4

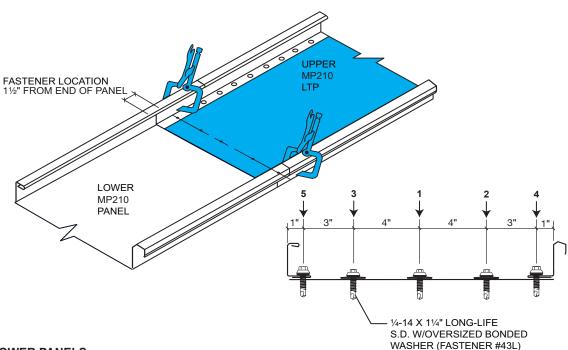


UPPER AND LOWER PANELS

- 1. C-clamp both female vertical legs together.
- 2. Install 1/4-14 x 1 1/4" long life fasteners (43L) in the sequence shown.

RIVETED RAIL LTP INSTALLATION (cont'd.)


STEP 5

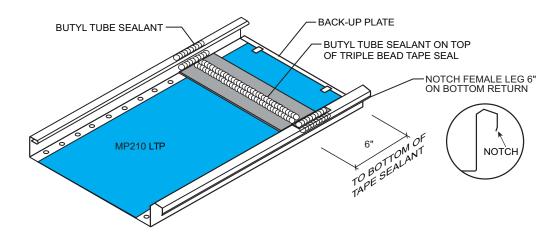

UPSLOPE END OF LTP

- 1. Install Back-up plate on lower LTP panel.
- 2. Install Triple Bead Tape as shown on LTP Panel.
- 3. Install Butyl Sealant as shown up the vertical legs and over the male and female seam.
- 4. Apply generous bead of butyl sealant on top of triple bead tape sealer.

STEP 6

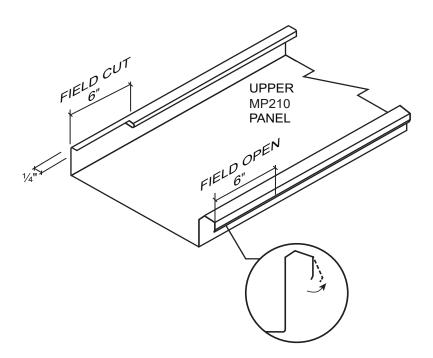


UPPER HS PANEL DOWN SLOPE END

- 1. Field cut male leg 6" as shown.
- 2. Field open female leg 6" to allow panel lap to engage..

RIVETED RAIL LTP INSTALLATION (cont'd.)


STEP 7

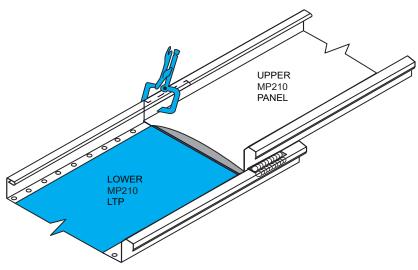

UPPER AND LOWER PANELS

- 1. C-clamp both vertical male legs together prior to rotating upper panel into place.
- 2. Lift panel up slightly in center of panel to help get male and female legs to nest properly.


STEP 8

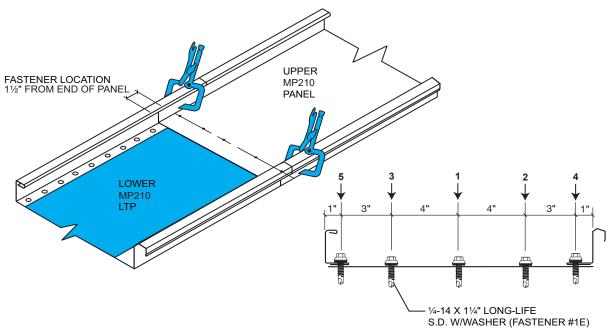

UPPER AND LOWER PANELS

- 1. C-clamp both female vertical legs together.
- 2. Install 1/4-14 x 1 1/4" long life fasteners (#1E) in the sequence as shown.

ROOF CURB INSTALLATION INSTRUCTIONS

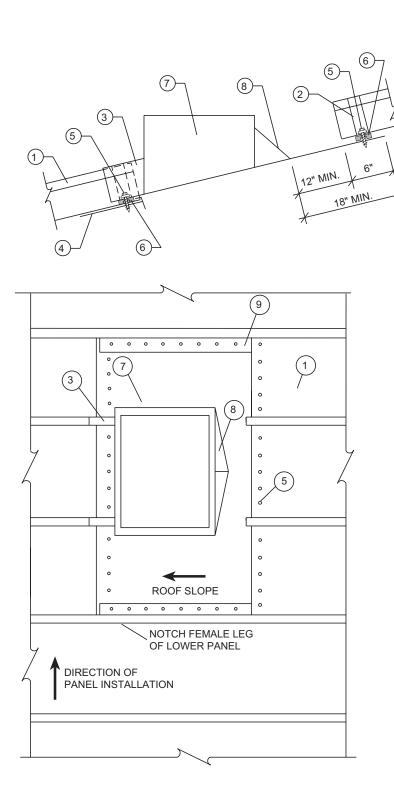

- 1. MP210 Panel
- 2. Urethane Sealant
- 3. Outside Cap Cell
- 4. Back-up Plate
- 5. Fastener #1E
- 6. Tri-bead Tape Sealer
- 7. Roof Curb Made From Structural Aluminum (Min. .080 Thickness)
- 8. Water Diverter
- Panel Fins (to be cut from an extra panel the length equal to length of the curb).

When ordering curbs, specify one-piece curbs as shown on this page.


Indiana Metal recommends that only onepiece .080 Aluminum (Min.) roof curbs be used with the MP210 roof system. The roof curb will be installed under the roof panels on the upslope end and over the panels at the downslope end. To accomplish this, the roof panels must be endlapped at the upslope and downslope end of the curb. This allows both ends of the curb to shed water and places the heavier gauge metal of the curb under the roof panels for better resistance to foot traffic. The exception is at the downslope end where the curb is on top of the roof panels. Since there are endlaps at this area, back-up plates provide support.


Outside cap cells (for bottom) are used to seal the panel to the roof curb. If the curb must be located in a precise location, order the cap cells loose for field installation.

For the purpose of these instructions, a curb with a factory attached cap cell is illustrated. Panels are assumed to be blank and installed right to left.

CAUTION

CURB INSTALLATION FLOATING ROOF CURB SUPPORT GUIDE

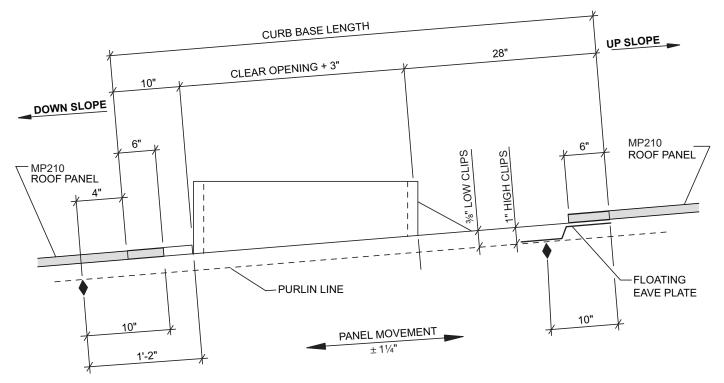


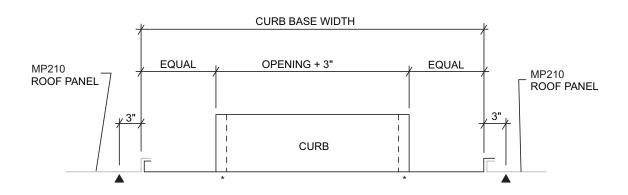

- ♦ INDICATES ROOF PANEL SUPPORTS
- ▲ INDICATES CURB BASE SUPPORTS
- * ADDITIONAL UPLIFT SUPPORTS ARE REQUIRED FOR THE ATTACHMENT OF THE CURB UPLIFT PLATES ONLY

CAUTION

CURB INSTALLATION CURB BASE INSTALLATION #1

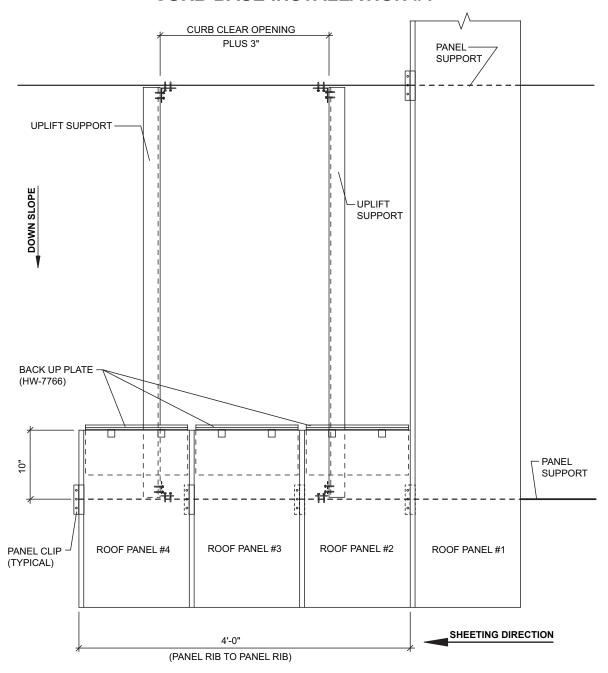


NOTES:

- 1. Install all lower roof panels to support the curb base.
- 2. Install back up plates.

CAUTION

CURB INSTALLATION CURB BASE INSTALLATION #2

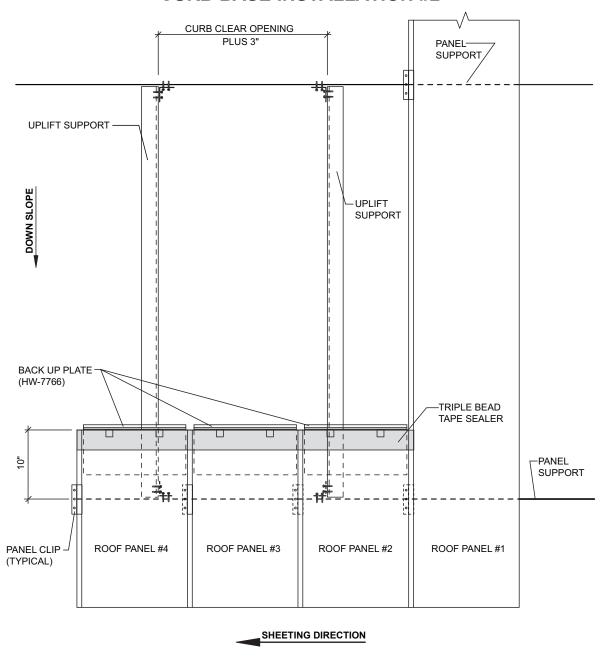


NOTES:

1. Apply Triple Bead tape sealer (HW-502) on roof panels as shown

CAUTION

CURB INSTALLATION CURB BASE INSTALLATION #3

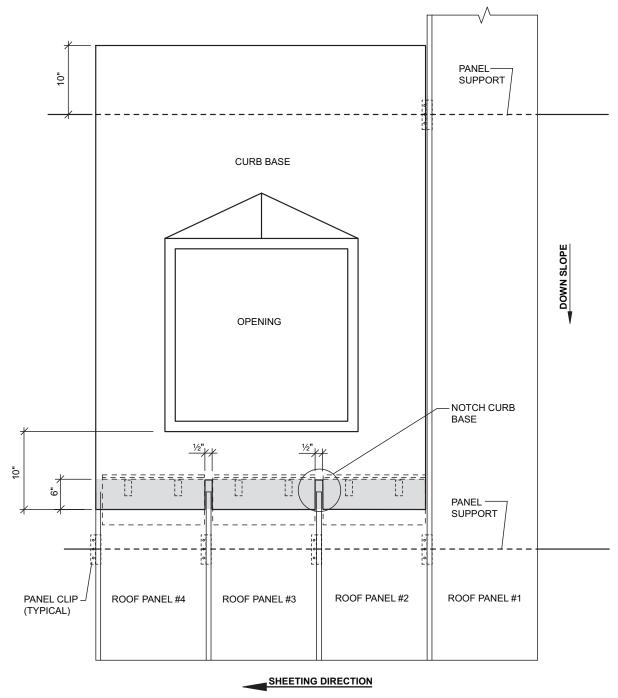


NOTES:

- 1. For field located Panel Fin Caps, notch Curb Base at all panel Fins.
- 2. Install Curb Base on lower roof panels with a 3" End Lap.

CAUTION

CURB INSTALLATION CURB BASE INSTALLATION #4

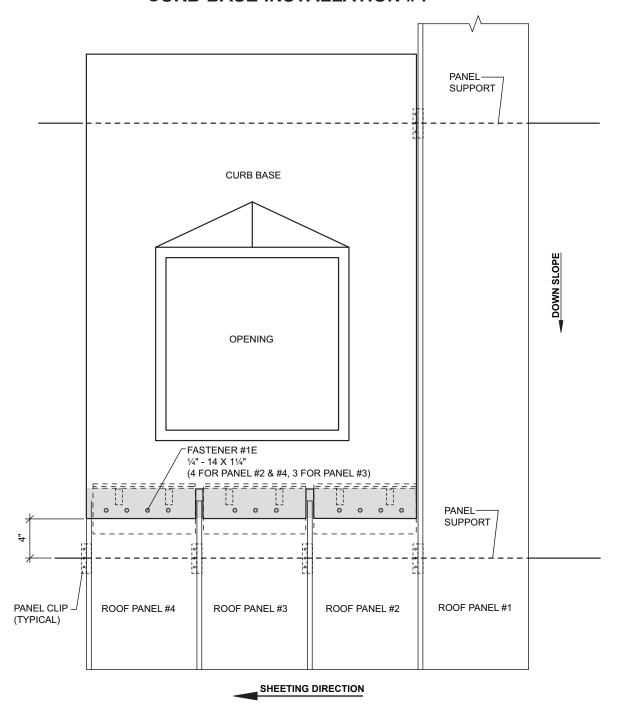


NOTES:

1. Attach the Curb Base to the roof panels.

CAUTION

CURB INSTALLATION CAP CELL INSTALLATION

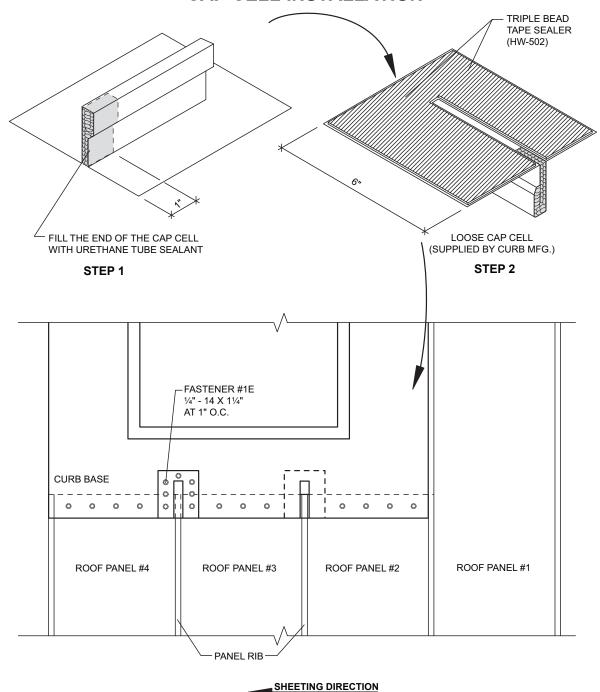


NOTES:

1. Fill Fin cavity of Cap Cell with Urethane Tube Sealant. Apply Triple Bead tape sealer (HW-502) on the bottom of (2) loose the Cap Cell, install over the panel Fins and attach with (6) Fastener #1E.

CAUTION

CURB INSTALLATION CURB PANEL FIN PREPARATION

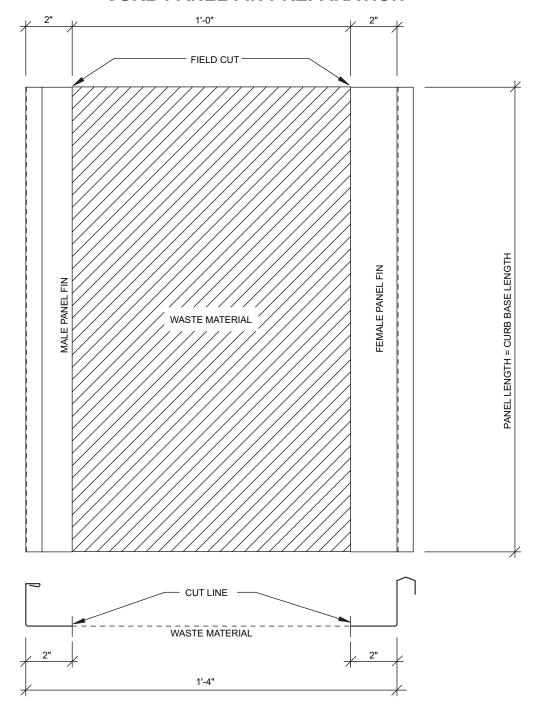


NOTES:

1. Field cut male and female panel ribs from an extra roof panel supplied by the building manufacturer.

CAUTION

CURB INSTALLATION FEMALE PANEL FIN INSTALLATION

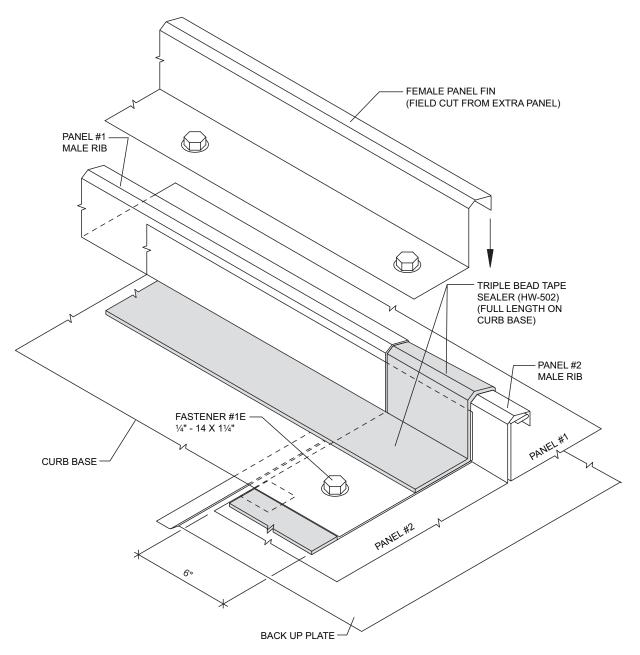


NOTES:

- 1. Install Triple Bead tape sealer (HW-502) to panel #2 Male Fin, and along the edge of the Curb Base.
- 2. Install the Female Panel Rib over the tape sealer and attach with Fastener # 1E at 12" O.C.

CAUTION

CURB INSTALLATION MALE PANEL FIN INSTALLATION

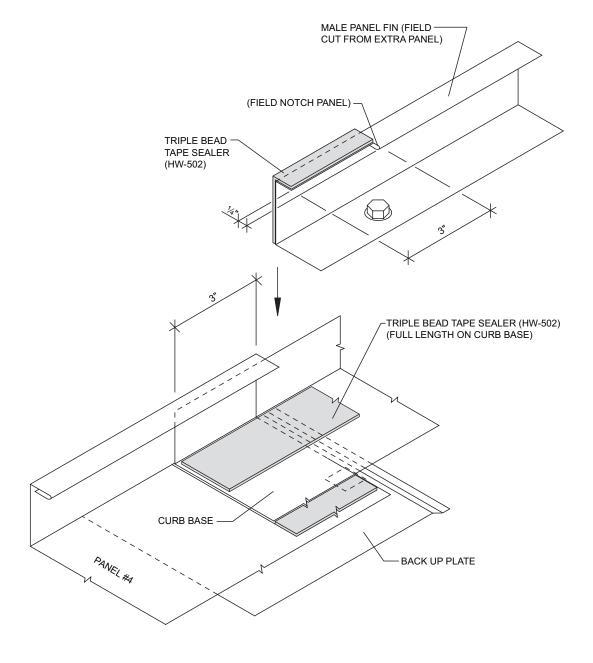


NOTES:

- 1. Notch the male Panel Fin. Apply Triple Bead tape sealer (HW-502) to the top and side of the Male Panel Fin.
- 2. Apply Triple Bead tape sealer on the Curb Base under the male Panel Fin.
- 3. Insert the field cut male Panel Fin on top of the Triple Bead tape sealer.


CAUTION

CURB INSTALLATION CURB BASE INSTALLATION #5

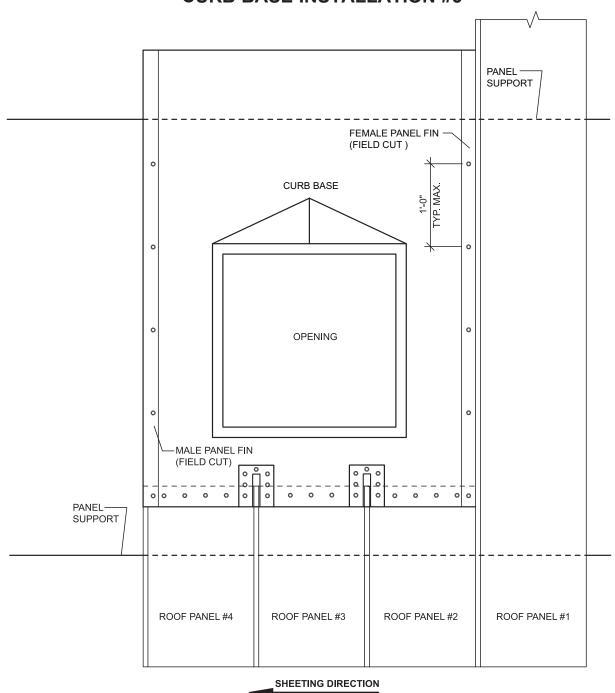

CAUTION

CURB INSTALLATION CURB BASE INSTALLATION #6

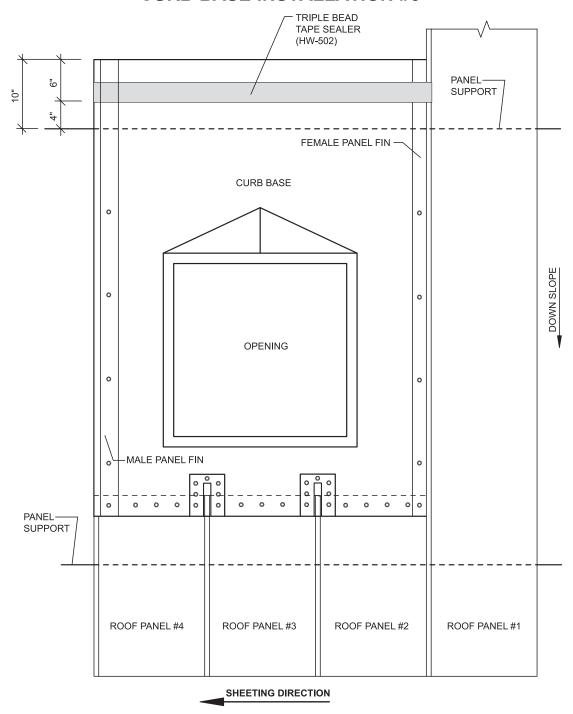


NOTES:

1. Apply Triple Bead tape sealer (HW-502) on Curb Base at the up hill end.

CAUTION

CURB INSTALLATION CURB BASE INSTALLATION #7

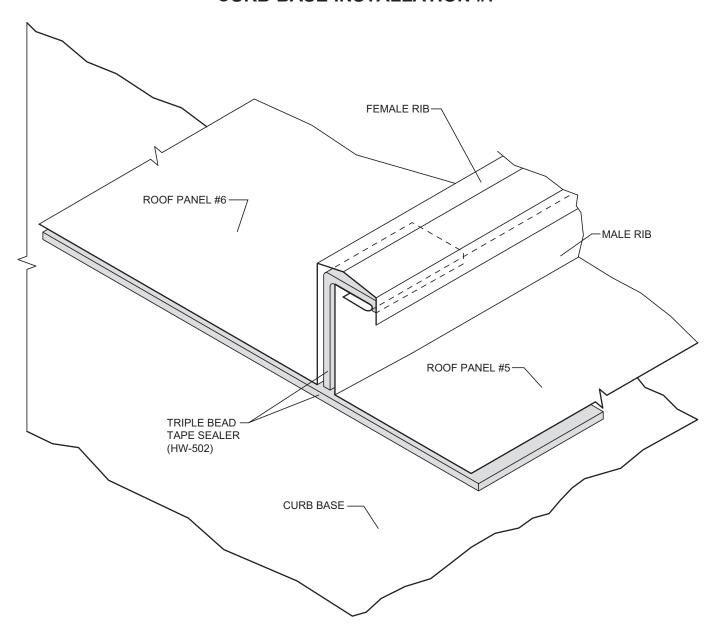


NOTES:

1. Apply Triple Bead tape sealer (HW-502) between the Panel Fins on Panels #5 and #6 for water seal.

CAUTION

CURB INSTALLATION CURB BASE INSTALLATION #8

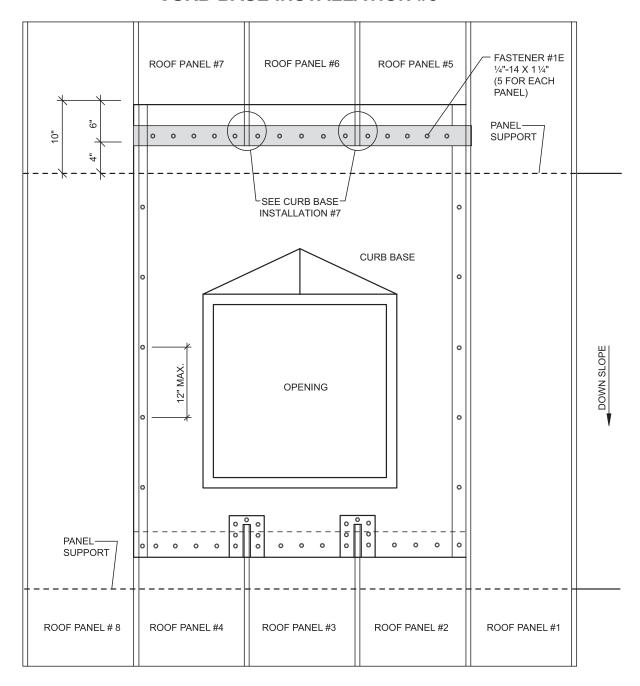


NOTES:


- 1. Install Roof Panels #5, #6, & #7 to the Curb Base on top of the tape sealer with Fastener #1E (5 per panel).
- 2. Install Roof Panel #8.

CAUTION

CURB INSTALLATION UPLIFT PLATE DETAIL

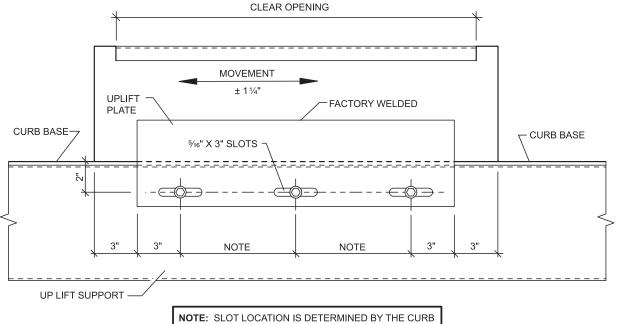


LENGTH, MAXIMUM SPACING IS 12" O.C.

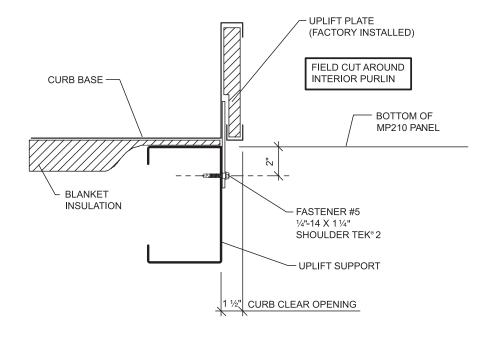

CAUTION


CURB INSTALLATION UPLIFT PLATE FIELD NOTCH

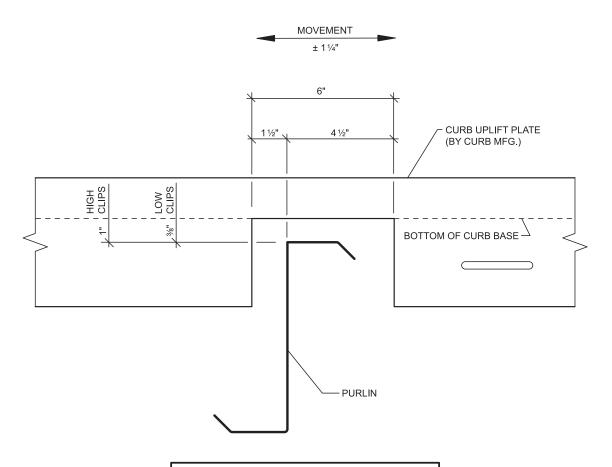

UPLIFT PLATE MUST BE FIELD NOTCHED AROUND THE BUILDING PURLIN TO ALLOW FOR PANEL MOVEMENT.


CAUTION

CURB INSTALLATION DOWN SLOPE CURB BASE END LAP

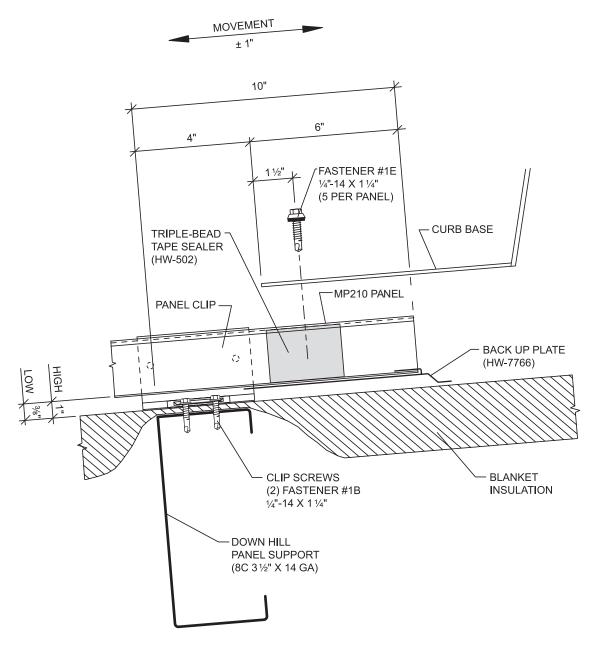


CAUTION

CURB INSTALLATION UP SLOPE CURB BASE END LAP

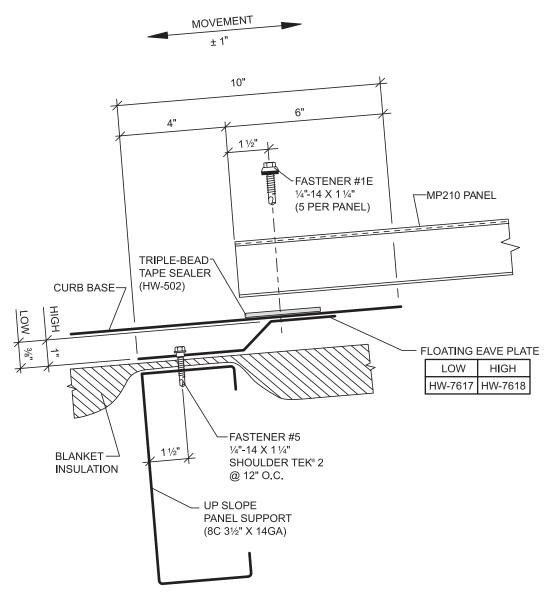


CAUTION

PIPE PENETRATION INSTALLATION RECOMMENDED SMALL AND LARGE PIPE PENETRATION INSTALLATION

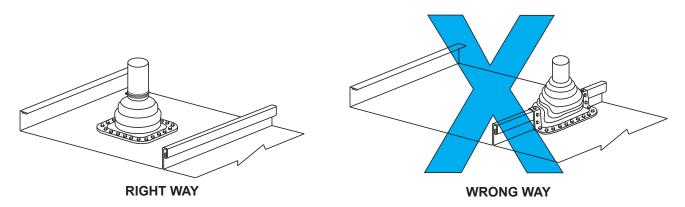


RECOMMENDED SMALL PIPE PENETRATION INSTALLATION INSTALL PIPE IN CENTER OF PANEL TO ALLOW BASE OF RUBBER ROOF JACK TO LAY FLAT

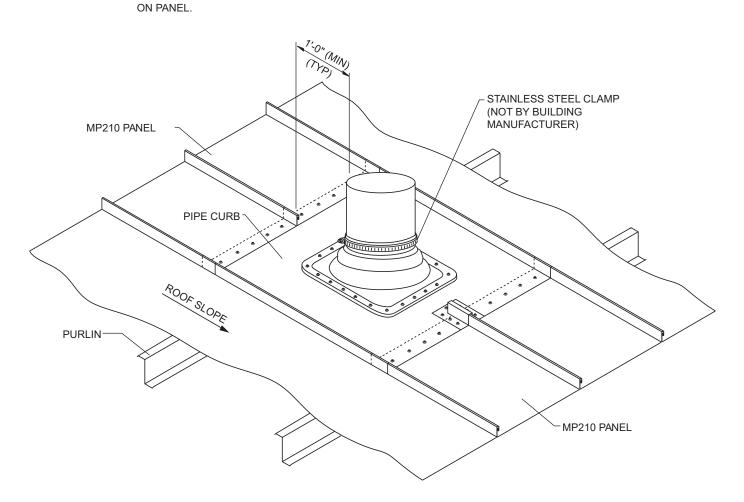



RECOMMENDED LARGE PIPE PENETRATION INSTALLATION

THIS METHOD TO BE USED IN ALL CASES WHERE A PIPE PENETRATION INTERSECTS A PANEL RIB OR WHEN THE PIPE IS TOO LARGE AND WILL NOT ALLOW ADEQUATE WATER FLOW DOWN THE PANEL.

PIPE PENETRATION INSTALLATION DECK-TIGHT INSTALLATION

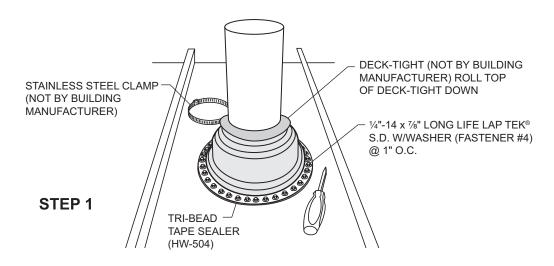


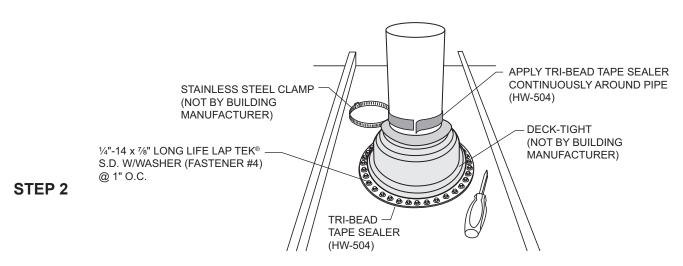

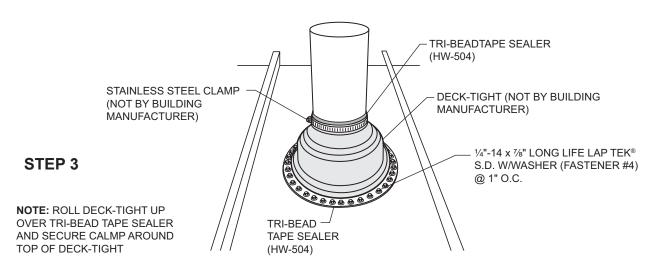


DETAILS

OPEN FRAMING FIXED EAVE WITH SCULPTURED GUTTER

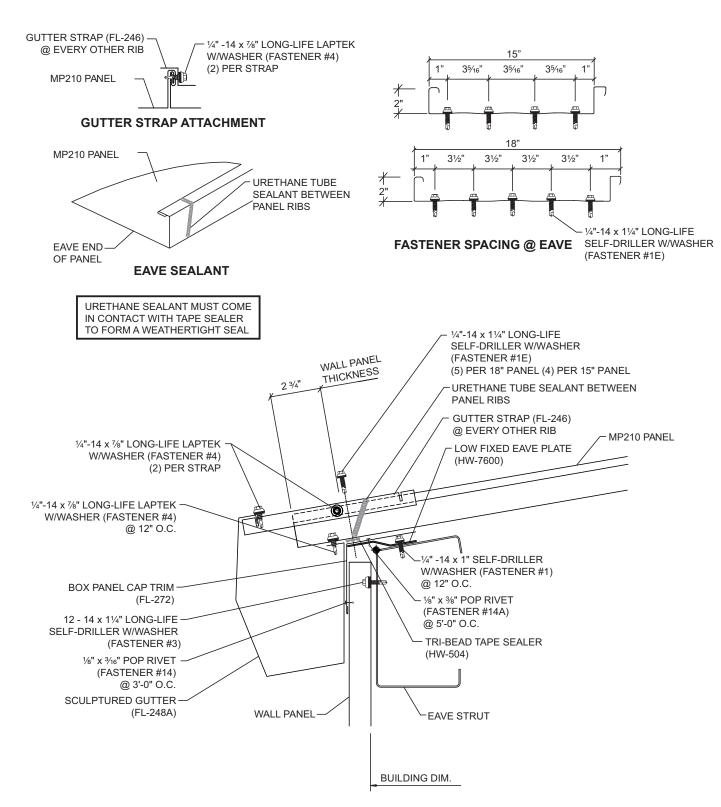


DETAILS


OPEN FRAMING FIXED EAVE WITH SCULPTURED EAVE TRIM

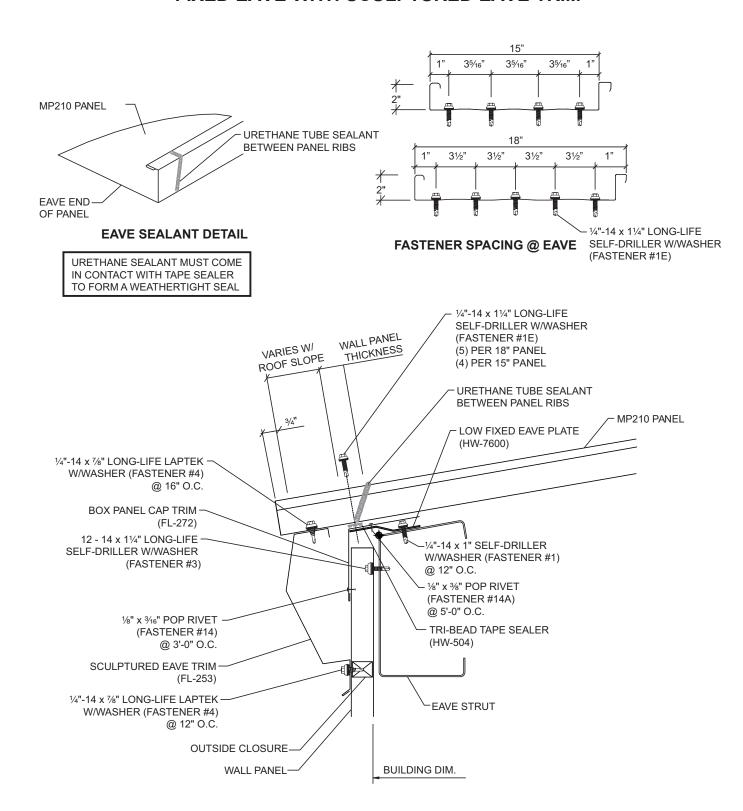


OPEN FRAMING FIXED EAVE WITH BOX EAVE TRIM

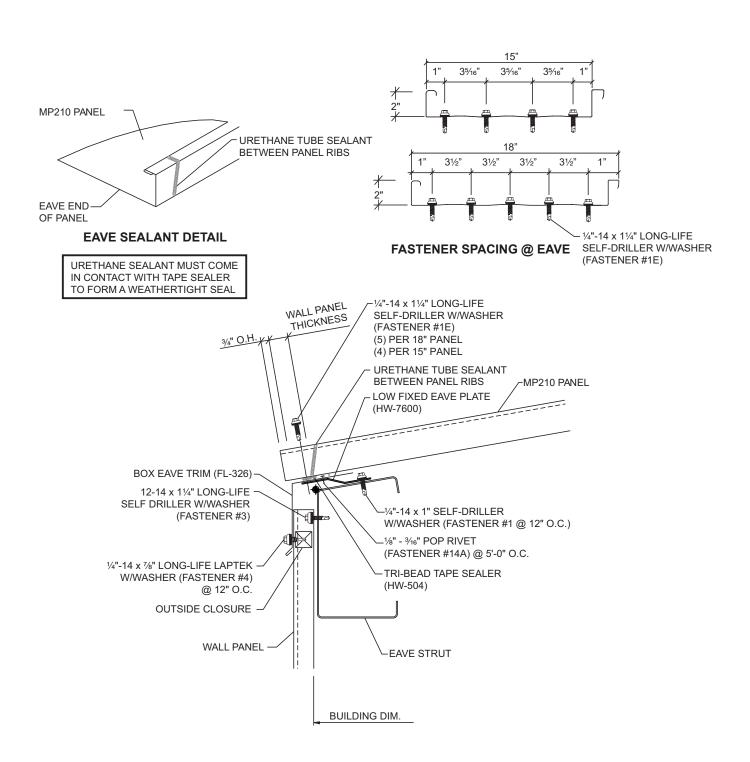


OPEN FRAMING FLOATING RIDGE

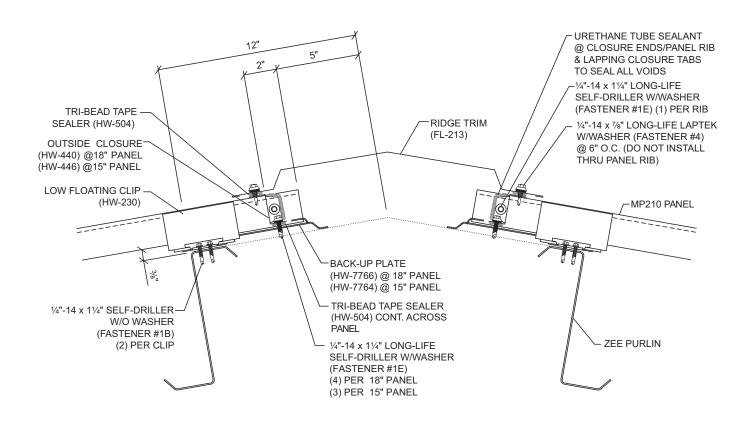


OPEN FRAMING FLOATING VENTED RIDGE

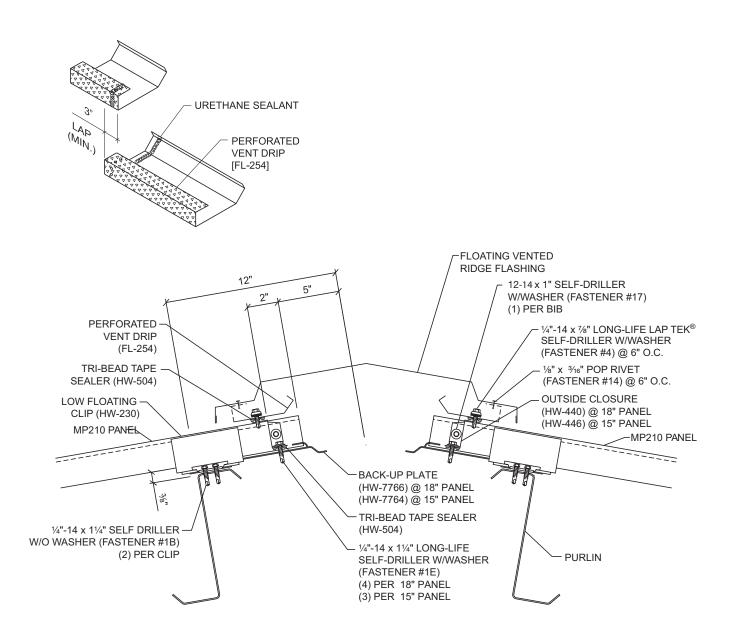


OPEN FRAMING FIXED VENTED EAVE

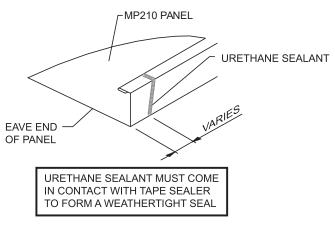


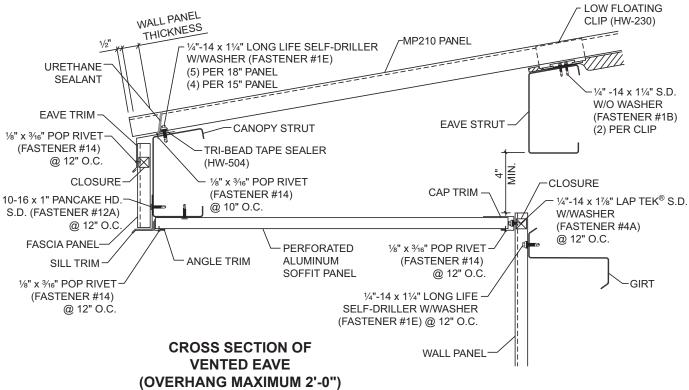


OPEN FRAMING SCULPTURED RAKE

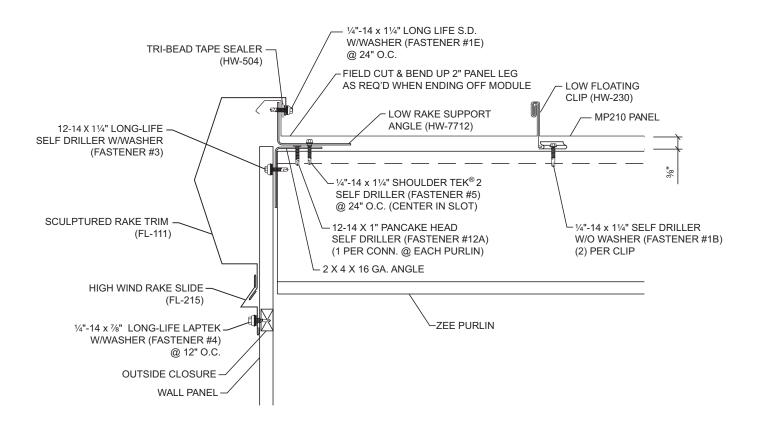


OPEN FRAMING SCULPTURED RAKE WITH CLEAT

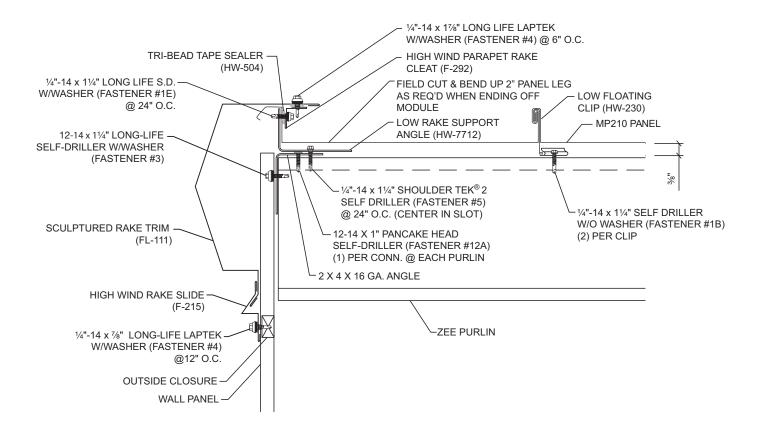


OPEN FRAMING PARAPET RAKE

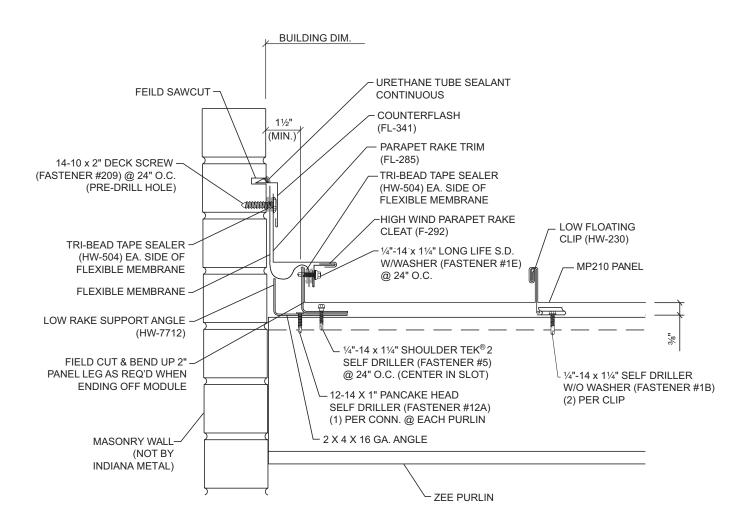


OPEN FRAMING FLOATING SCULPTURED HIGH SIDE EAVE

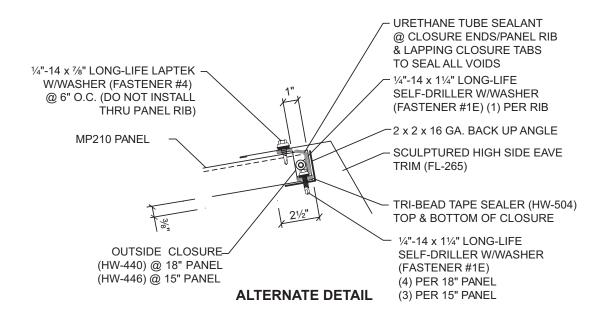


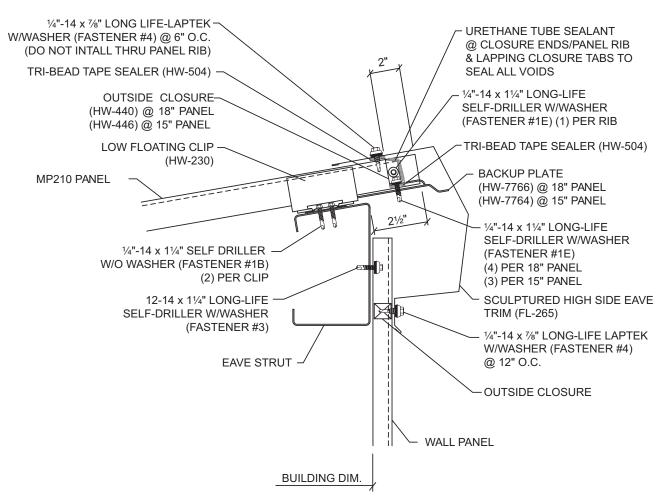


OPEN FRAMING PARAPET FLOATING HIGH SIDE EAVE

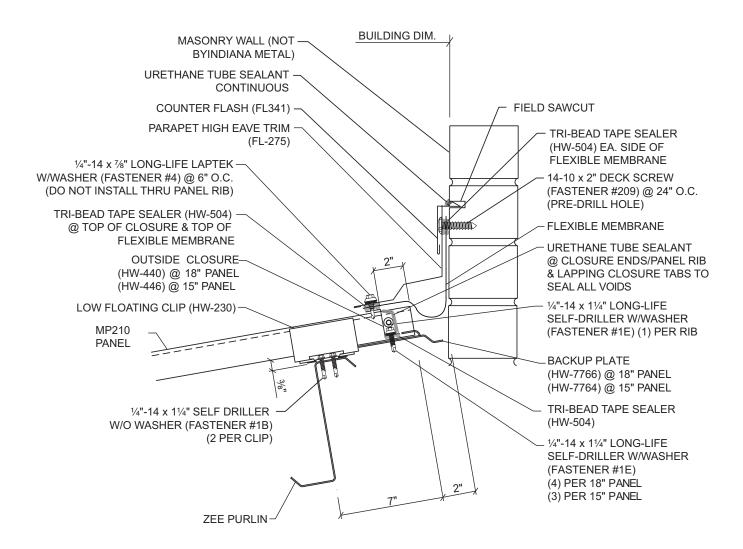


OPEN FRAMING FIXED VALLEY

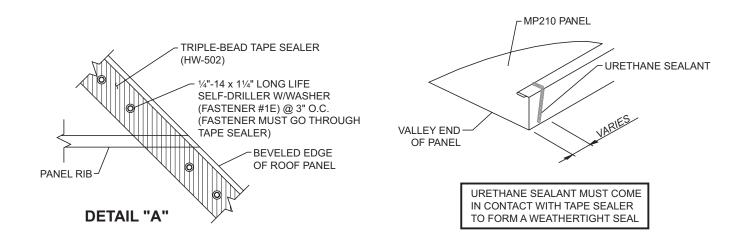


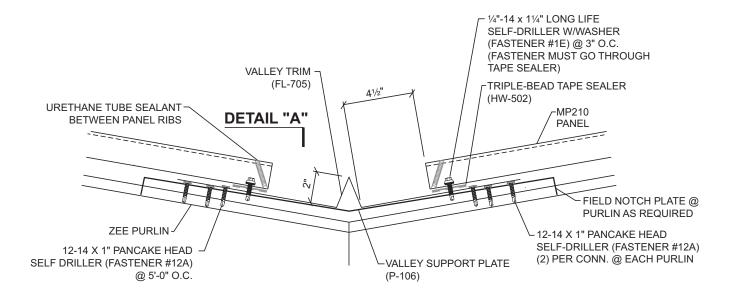


OPEN FRAMING FLOATING HIP

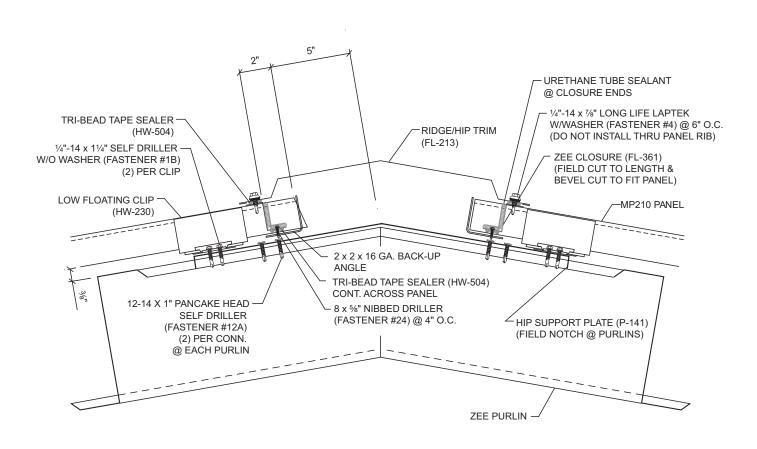


FIELD HEMMING PANEL END

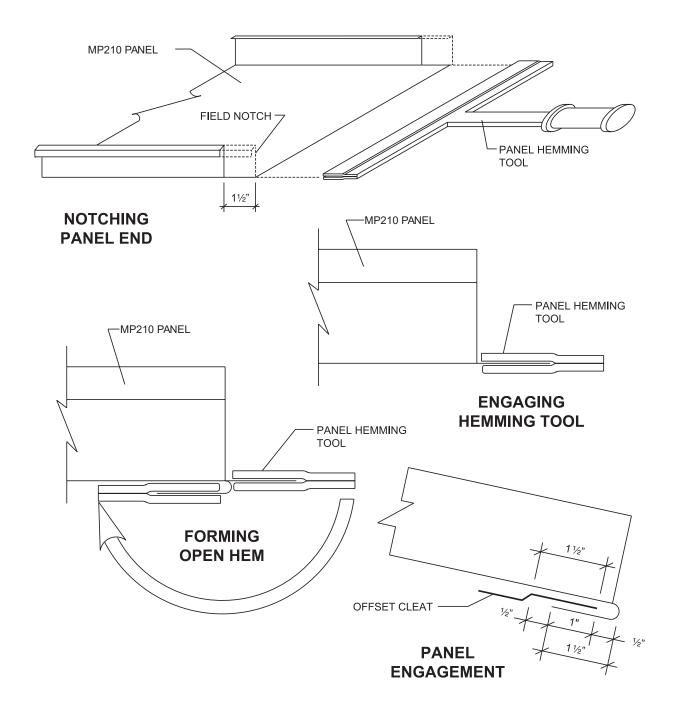


WOOD DECK FLOATING ENDLAP

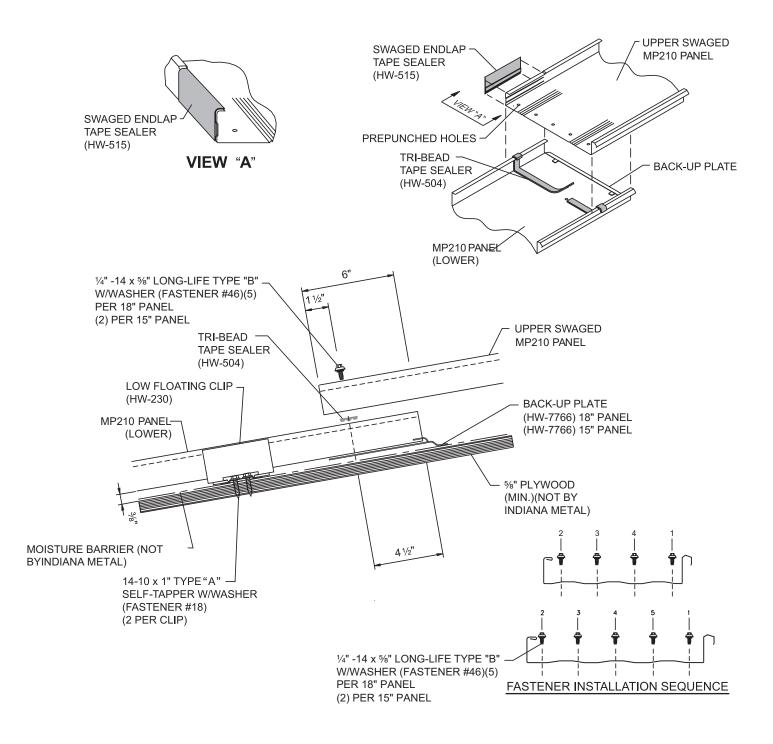


WOOD DECK FLOATING EAVE WITH BOX GUTTER

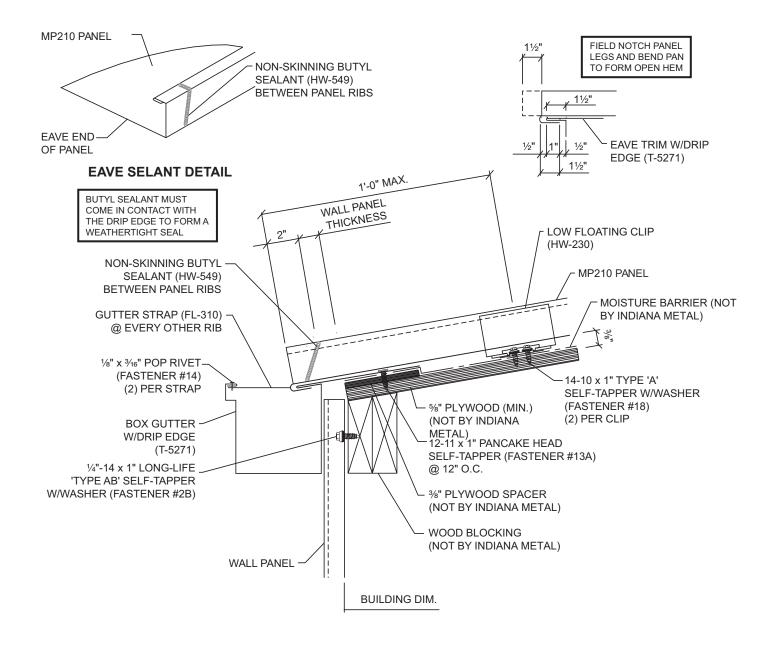


WOOD DECK FLOATING EAVE WITH EAVE TRIM WITH EXTENDED DRIP EDGE

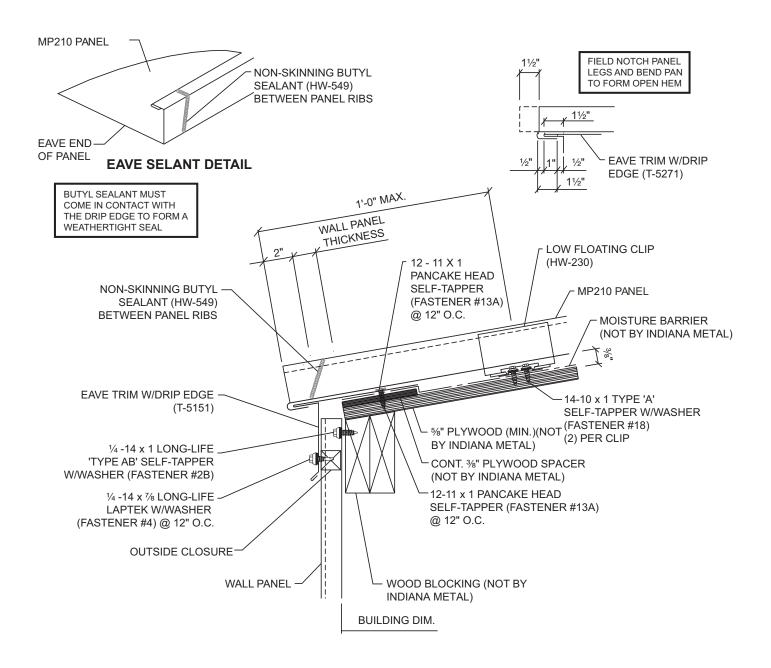


WOOD DECK FIXED RIDGE

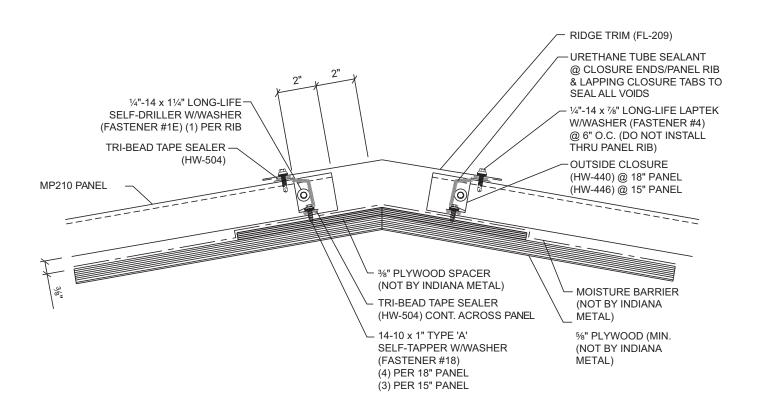


WOOD DECK FIXED VENTED RIDGE

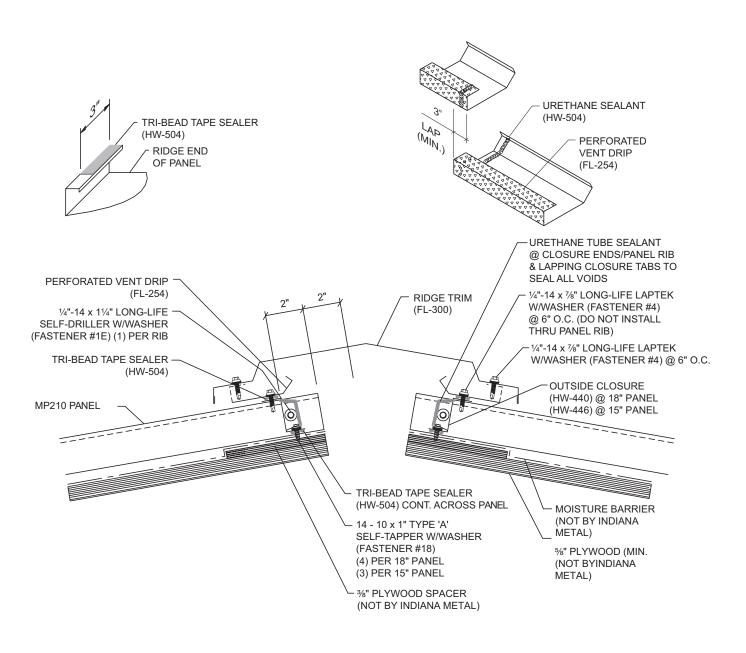


WOOD DECK BOX RAKE

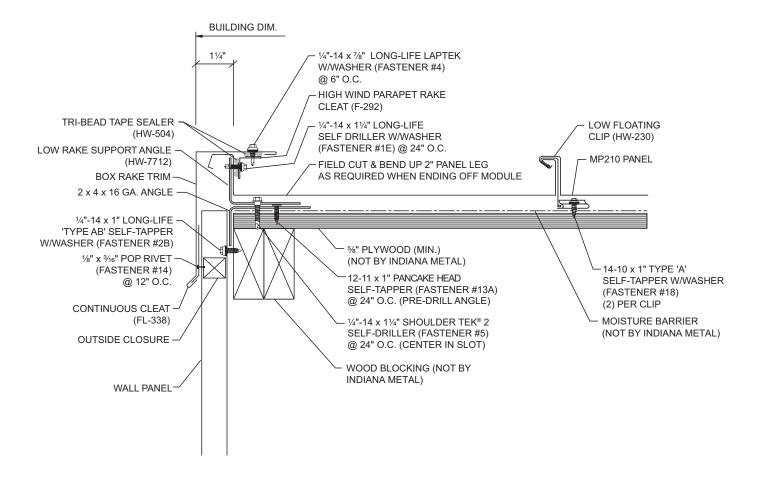


WOOD DECK PARAPET RAKE

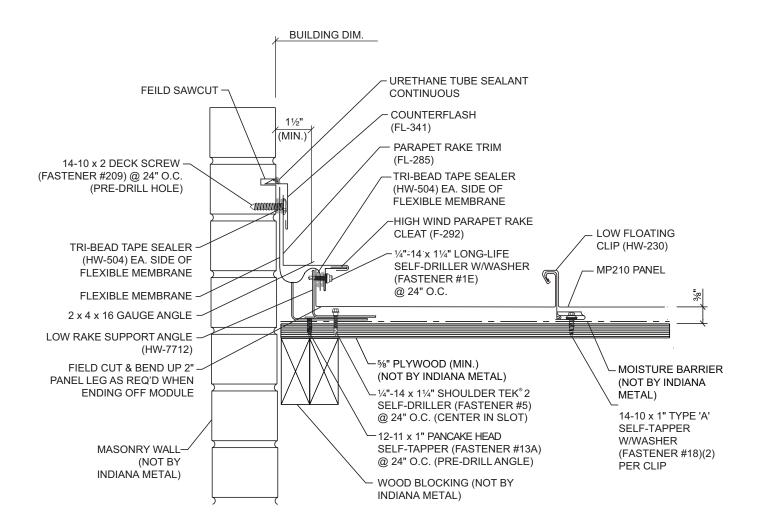


WOOD DECK FIXED BOX HIGH SIDE EAVE




HIGH EAVE SEALANT DETAIL

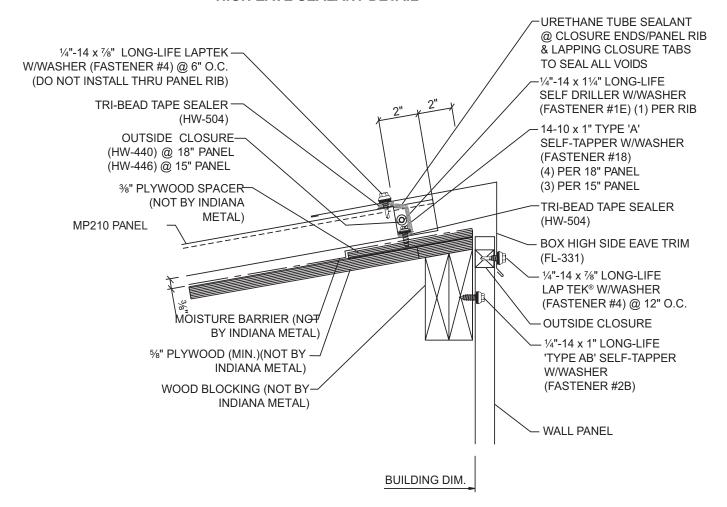



WOOD DECK PARAPET FIXED HIGH SIDE EAVE

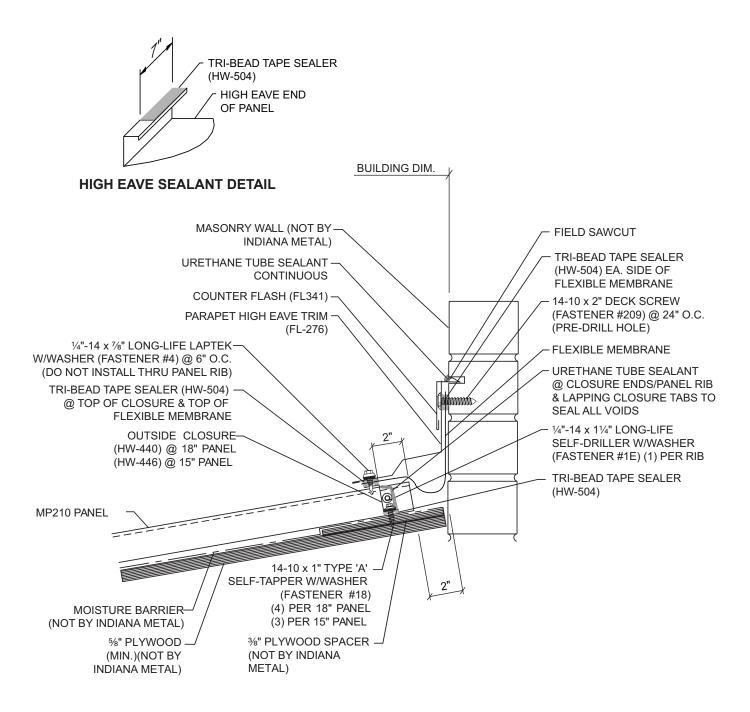

WOOD DECK FLOATING VALLEY

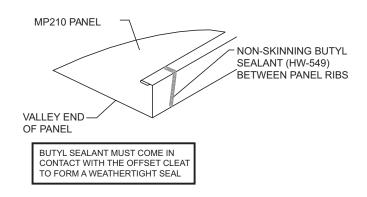




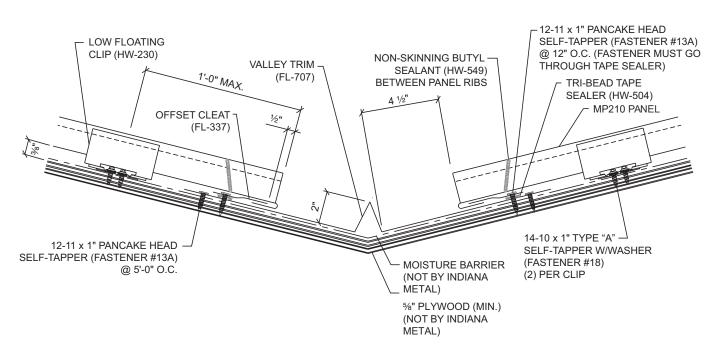


NOTE: DO NOT USE THIS DETAIL ON ROOF SLOPES LESS THAN 3:12


WOOD DECK FIXED HIP

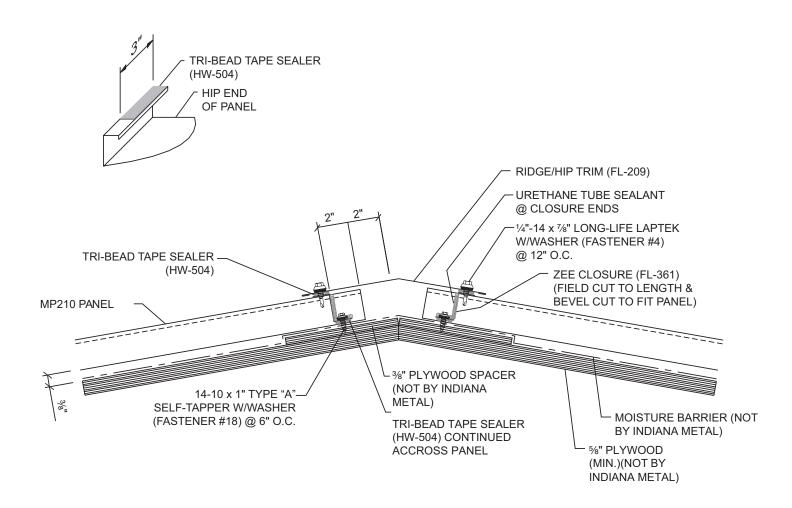


RIGID INSULATION OVER METAL DECK FLOATING ENDLAP

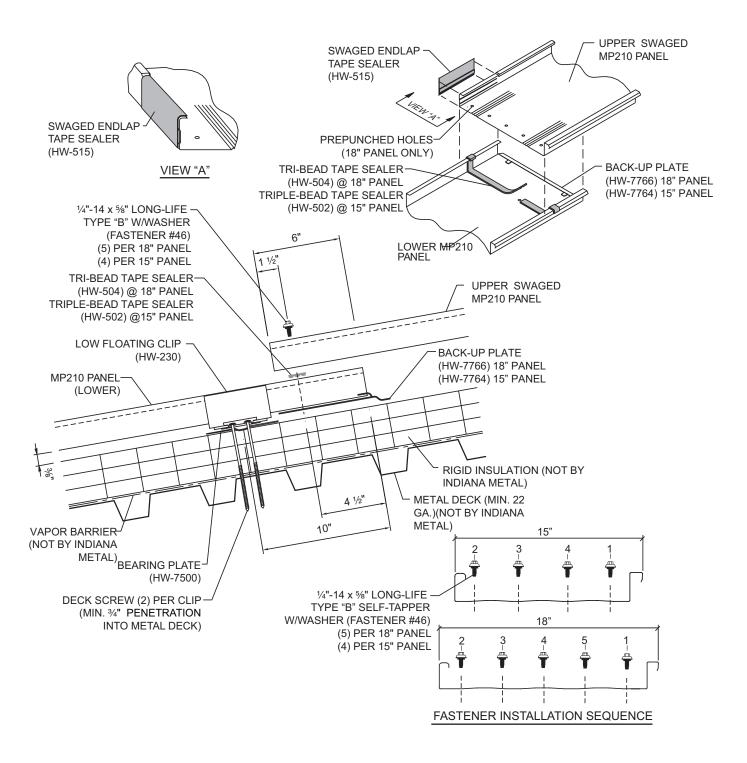


RIGID INSULATION OVER METAL DECK FLOATING EAVE WITH BOX GUTTER

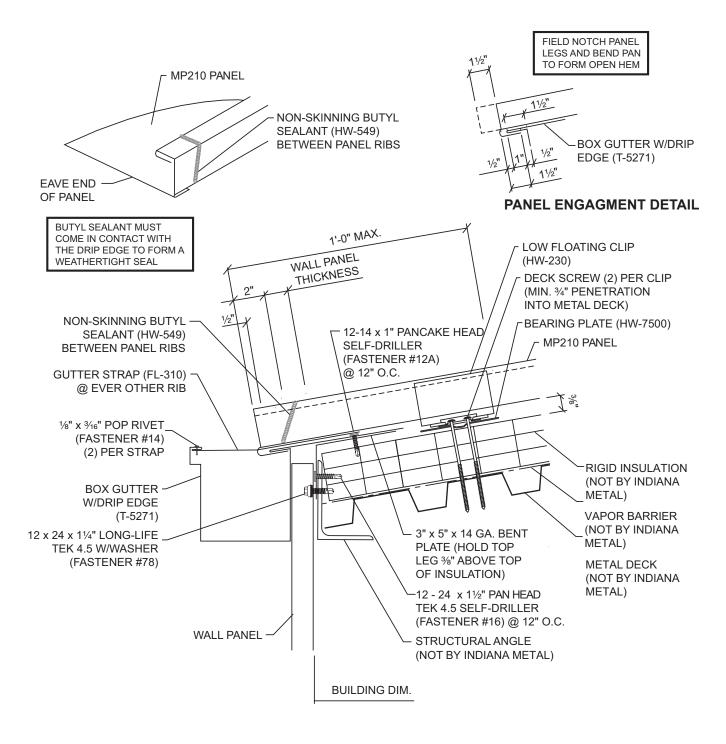


RIGID INSULATION OVER METAL DECK FLOATING EAVE WITH EAVE TRIM WITH EXTENDED DRIP EDGE

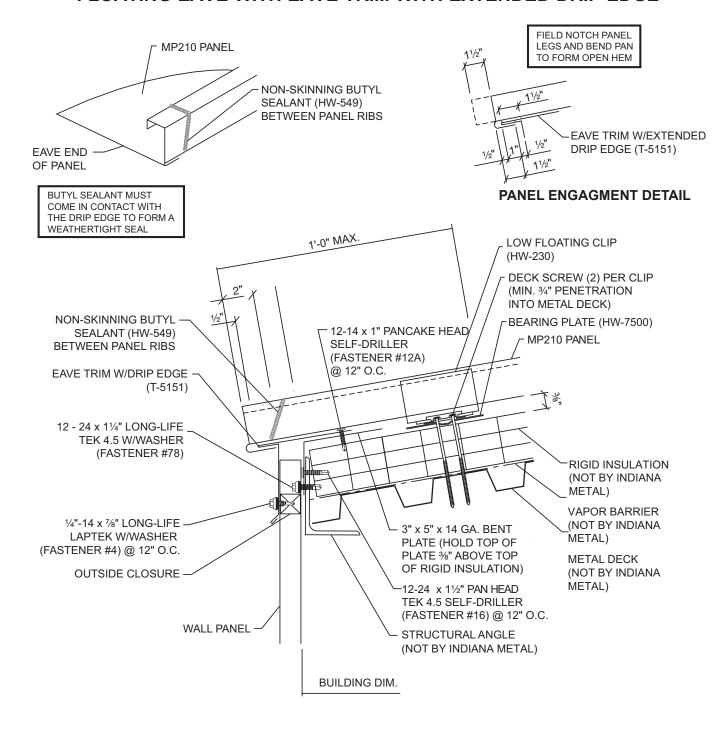


RIGID INSULATION OVER METAL DECK FIXED RIDGE

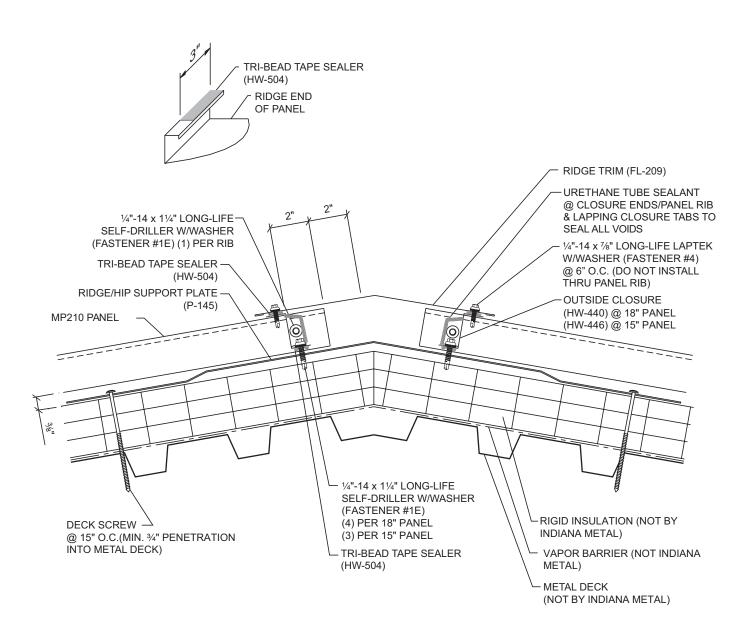


RIGID INSULATION OVER METAL DECK FIXED VENTED RIDGE

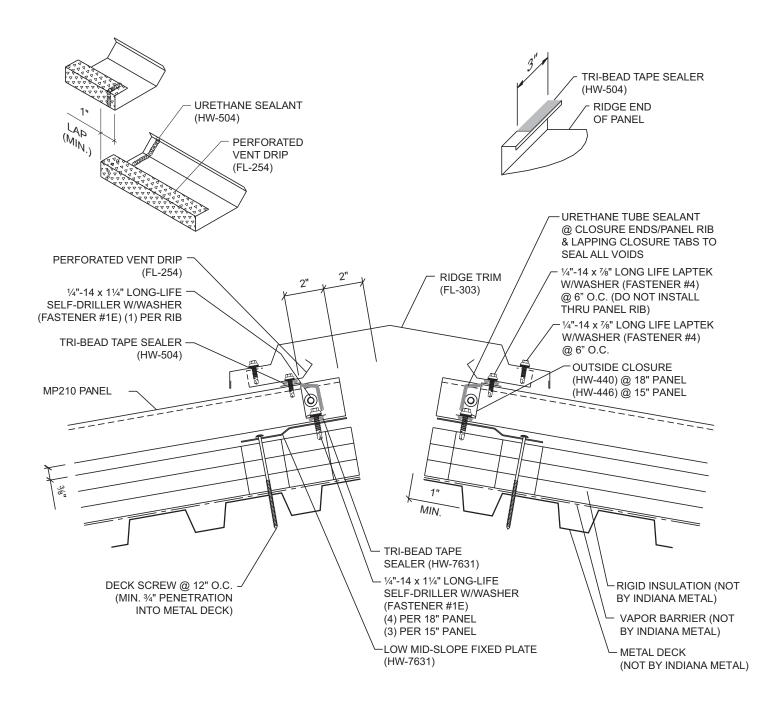


RIGID INSULATION OVER METAL DECK BOX RAKE

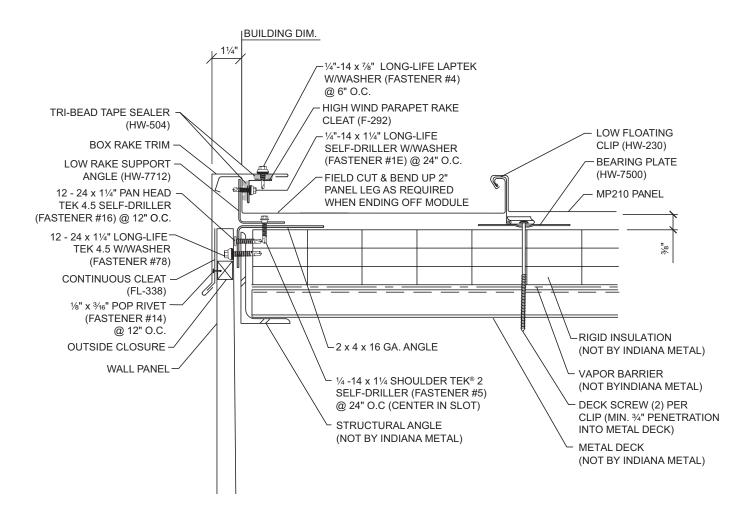


RIGID INSULATION OVER METAL DECK PARAPET RAKE

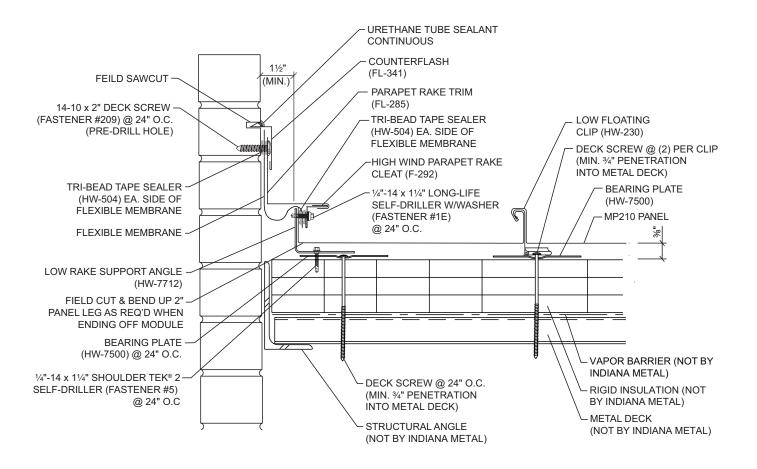


RIGID INSULATION OVER METAL DECK FIXED BOX HIGH SIDE EAVE

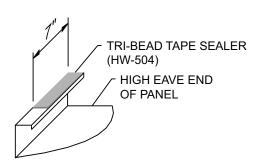


HIGH EAVE SEALANT DETAIL

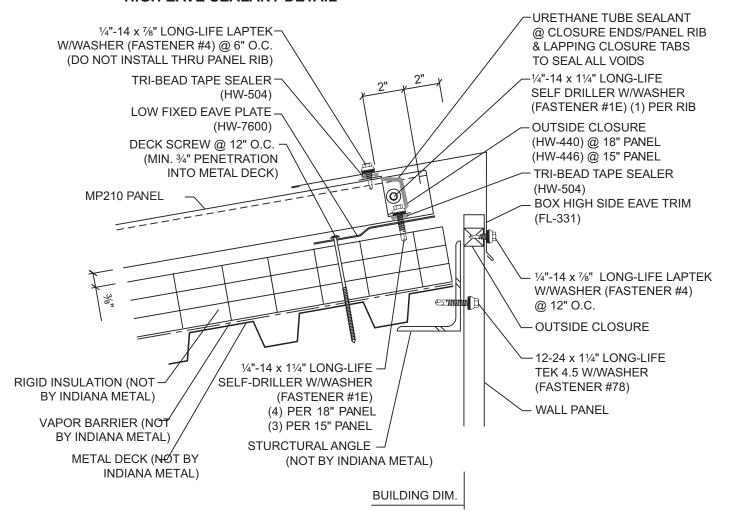

RIGID INSULATION OVER METAL DECK PARAPET FIXED HIGH SIDE EAVE

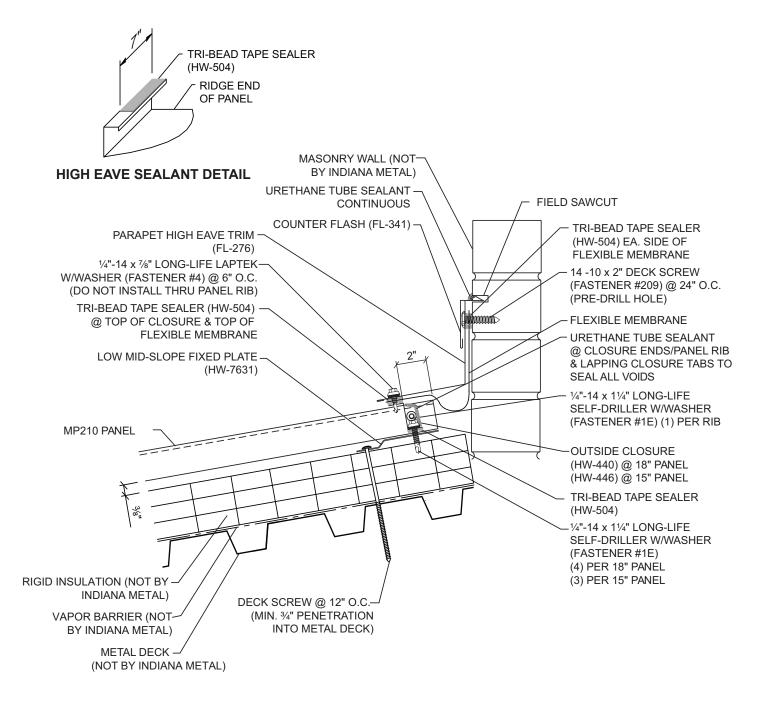


RIGID INSULATION OVER METAL DECK FLOATING VALLEY

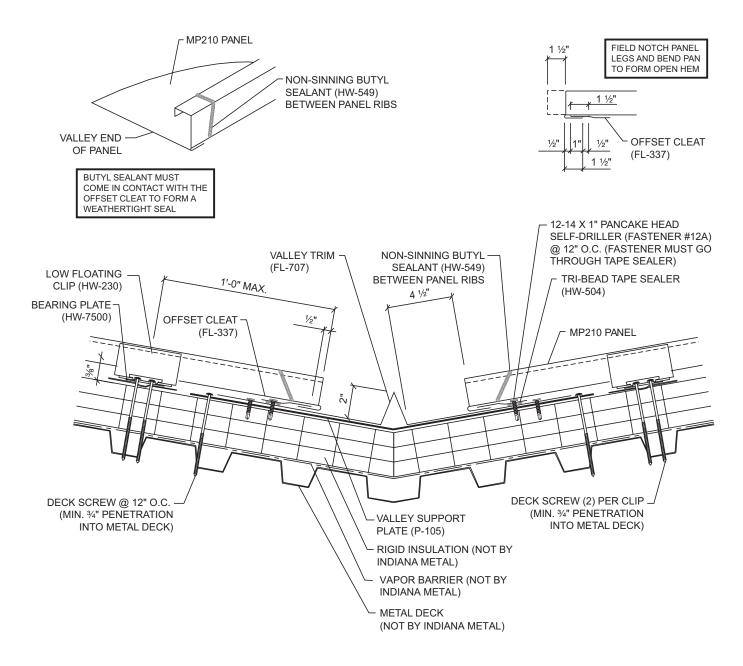

NOTE: DO NOT USE THIS DETAIL ON ROOF SLOPES LESS THAN 3:12

RIGID INSULATION OVER METAL DECK FIXED HIP

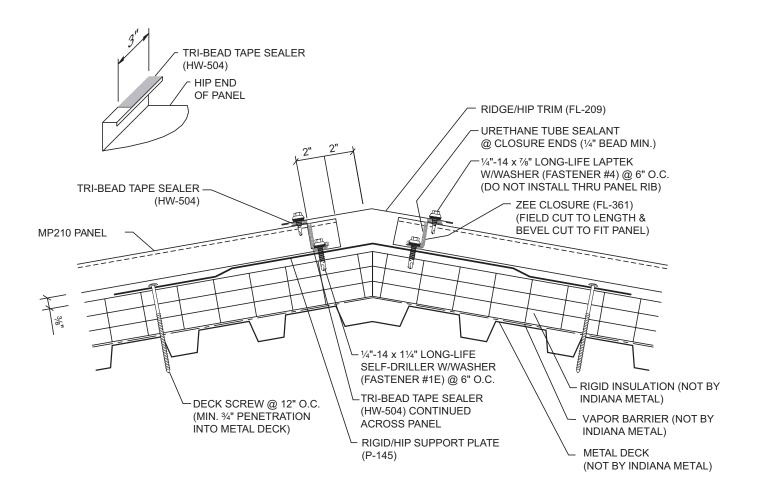

NOTES